


SUBMITTAL INFORMATION





GRIP JOINT FOR CTS ON BOTH ENDS BY GRIP JOINT FOR CTS SIDE OUTLET, **ASSEMBLED WATERTIGHT**

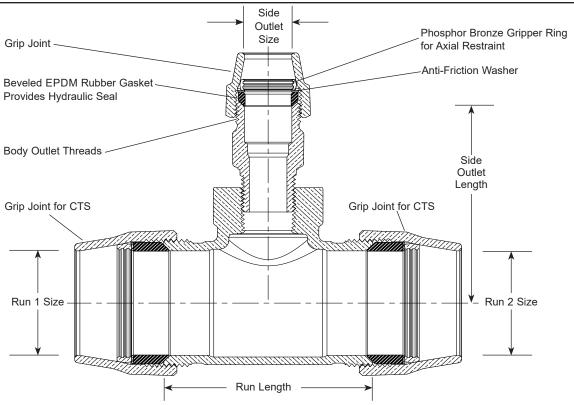

Due to design variations related to sizing, items may differ from images above.

Run 1 Size	Run 2 Size	SIDE OUTLET SIZE	Run	SIDE OUTLET	Approx	PART	✓ SUBMITTED
			LENGTH	LENGTH	Wt. Lbs.	Number	ITEM(S)
1-1/4"	1"	1"	7-17/32"	3-7/8"	4.4	T444-544-AWT-G-NL	
1-1/4"	1-1/4"	3/4"	7-15/32"	3-23/32"	4.1	T444-553-AWT-G-NL	
1-1/4"	1-1/4"	1-1/4"	7-15/32"	3-13/16"	4.7	T444-555-AWT-G-NL	
1-1/2"	1-1/2"	3/4"	4"	3-15/32"	3.6	T444-663-AWT-G-NL	
1-1/2"	1-1/2"	1"	4"	3-43/64"	3.8	T444-664-AWT-G-NL	
2"	2"	3/4"	4"	4-1/8"	4.9	T444-773-AWT-G-NL	

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Grip joints include beveled EPDM rubber gaskets that provide a hydraulic seal when tightened

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:

07/18/23