



SUBMITTAL INFORMATION

Grip Joint Cut-In Tee - (TD448-xxx-G-NL style)



GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) BOTH ENDS BY MALE IRON PIPE THREAD SIDE OUTLET

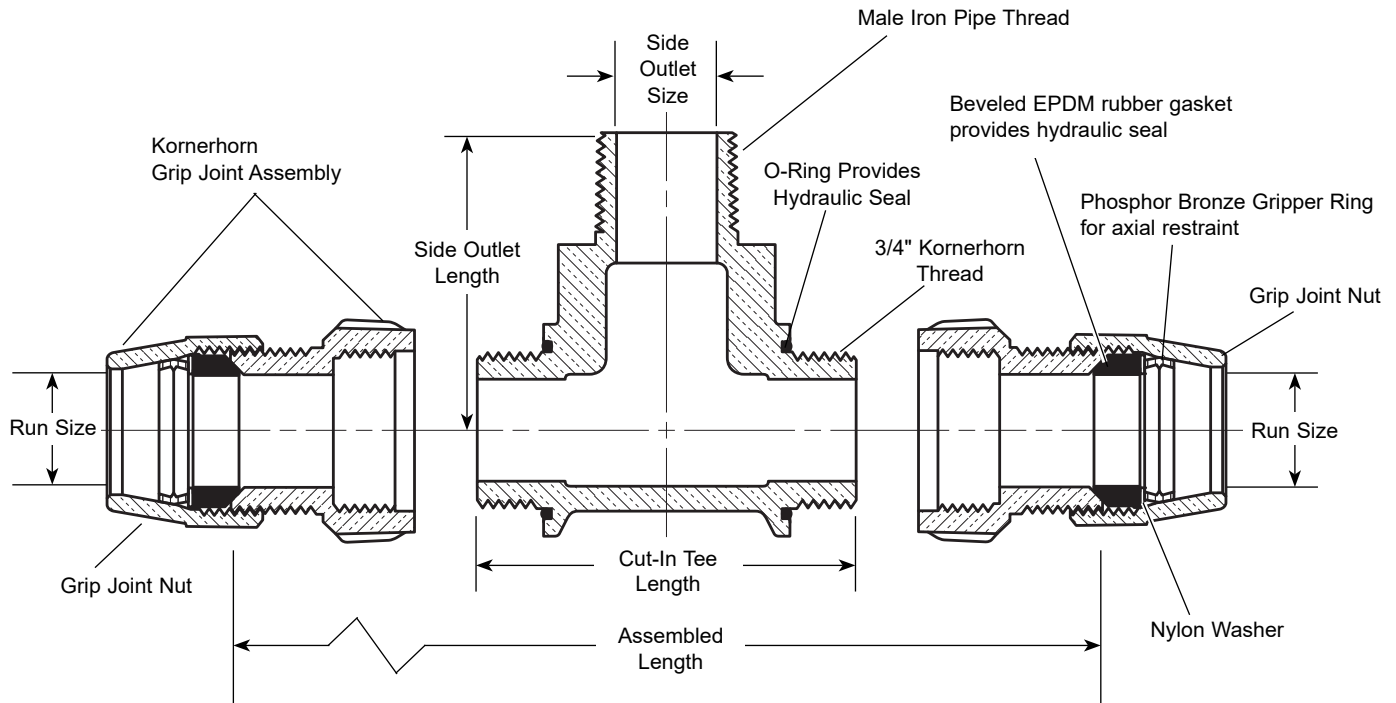

RUN SIZE	SIDE OUTLET SIZE	CUT-IN TEE LENGTH	SIDE OUTLET LENGTH	ASSEMBLED LENGTH	APPROX WT. LBS.	PART NUMBER	✓ SUBMITTED ITEM(S)
3/4"	3/4"	2-3/4"	2-3/16"	4-1/2"	1.8	TD448-333-G-NL	
1"	3/4"	4"	2-3/16"	5-7/8"	2.3	TD448-443-G-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Ideal for adapting existing service lines. Remove a 3" (min.) section of existing service line (4-1/4" (min.) section for 1" service lines). Remove burrs. Slip the detachable Grip Joints onto the ends of the line, screw them tight to each end of the inserted Tee. Tighten the Grip Joint Nuts.
- Uses Grip Joint Assemblies for KH-1, KH-2, KH-3 style Kornerhorn

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

03/24/17

Submitted By: