



# SUBMITTAL INFORMATION

## 70 Series Tandem Coppersetter - (TVBB74-xxW-11-44-FP-NL style)



FULL PORT ANGLE BALL VALVE BY FULL PORT ANGLE BALL VALVE (1" METER)

DOUBLE PURPOSE SWIVEL FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET

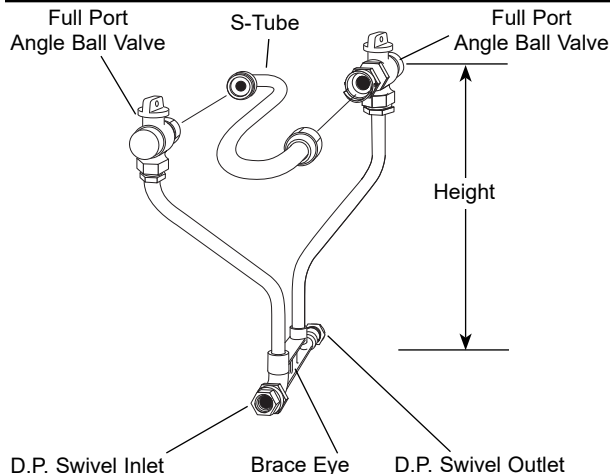

### Coppersetter Part Number

| HEIGHT (INCHES) | APPROX. WT. LBS. | CATALOG NUMBER         | ✓ SUBMITTED ITEM(S) |
|-----------------|------------------|------------------------|---------------------|
| 12              | 9.6              | TVBB74-12W-11-44-FP-NL |                     |
| 15              | 9.9              | TVBB74-15W-11-44-FP-NL |                     |
| 18              | 11.4             | TVBB74-18W-11-44-FP-NL |                     |
| 21              | 11.7             | TVBB74-21W-11-44-FP-NL |                     |
| 24              | 12.1             | TVBB74-24W-11-44-FP-NL |                     |
| 27              | 12.4             | TVBB74-27W-11-44-FP-NL |                     |
| 30              | 12.7             | TVBB74-30W-11-44-FP-NL |                     |
| 33              | 13.0             | TVBB74-33W-11-44-FP-NL |                     |
| 36              | 13.3             | TVBB74-36W-11-44-FP-NL |                     |
| 39              | 13.6             | TVBB74-39W-11-44-FP-NL |                     |
| 42              | 13.9             | TVBB74-42W-11-44-FP-NL |                     |



### Adapters for Regulator (MIP by Male Meter Thread)

| CATALOG NUMBER | METER SIZE | ADAPTER LENGTH | APPROX. WT. LBS. |
|----------------|------------|----------------|------------------|
| RA-4-NL        | 1"         | 2-1/4"         | 1.3              |

### Service Line Size

| INLET          | OUTLET         | SERVICE LINE CONN. SIZE | ✓ SUBMITTED ITEM(S) |
|----------------|----------------|-------------------------|---------------------|
| 1" D.P. Swivel | 1" D.P. Swivel | 44                      |                     |

**Note:** 12" minimum height for TVBB74 Coppersetters



### FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Copper conforms to ASTM B75 or B88, UNS C12200
- Ball valves are full port, having a full 1" waterway
- Bracing eye is standard on all 70 Series Coppersetters
- Tie bar is standard for 21" and taller Coppersetter heights (TVBB74 Series)
- 1-1/8" copper risers provide more flow capacity
- All Ford Setters are assembled with lead-free solder
- Unless specified otherwise, Tandem Coppersetters are designed to hold a water meter in series with a pressure regulator
- Tandem Coppersetters include an "S" tube and a pair of male iron pipe by male meter thread regulator adapters for holding a pressure regulator
- The directional angle ball valve shall be rated at 150 PSI when used as a customer shut-off on the outlet side of the meter

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

04/05/17

Submitted By: