


SUBMITTAL INFORMATION

Adapter Flange - (UFA200-C-x-E style)




UNI-FLANGE® SERIES 200 ADAPTER FLANGE FOR DUCTILE IRON PIPE WITH EPOXY COATING


Set Screw - AISI 4140 Steel;
Tensile 190,000 psi
minimum. Heat treated to
35-39 Rockwell C and zinc
plated for corrosion resistance

Flange - Ductile Iron per
ASTM A536, Grade 65-45-12.
Drilling to AWWA Class D and
E, ANSI B16.1 (125 lb.), or
ANSI B16.5 (150 lb.)

Finish - Fusion bonded epoxy

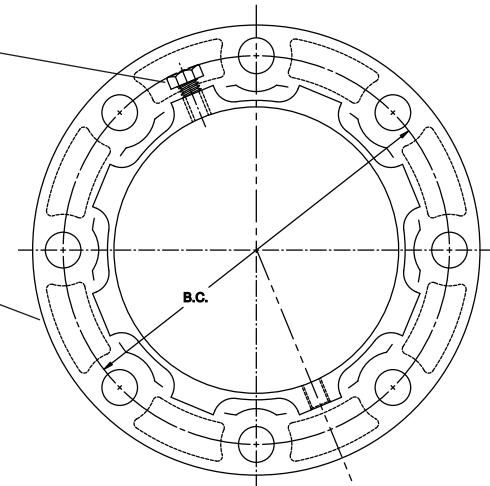

Gasket - SBR (Buna-S)
mechanical joint gasket

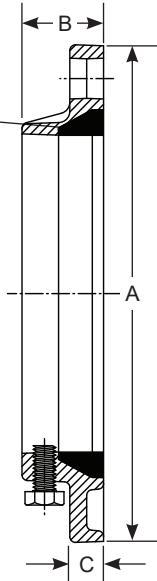

| NOM. PIPE SIZE | DUCTILE IRON PIPE | | APPROX. WT. LBS. | PRESSURE RATING PSI | SET SCREWS | | FLANGE | | | NO. OF BOLT HOLES | BOLT CIRCLE DIA. | ✓ SUBMITTED ITEM(S) |
|----------------------|-------------------|---------------|---------------------|---------------------------|------------|-------------|---------|----------------|----------------|-------------------------|------------------------|------------------------|
| | OD (IN.) | CATALOG NO. | | | NUMBER | SIZE | OD A | THICKNESS B | THICKNESS C | | | |
| 2" | 2.50 | UFA200-C-2-E | 4.2 | 200 | 2 | 1/2"x1" | 6" | 1-13/16" | 3/4" | 4 | 4-3/4" | |
| 3" | 3.96 | UFA200-C-3-E | 6.0 | 200 | 4 | 1/2"x1" | 7-1/2" | 1-13/16" | 3/4" | 4 | 6" | |
| 4" | 4.80 | UFA200-C-4-E | 8.5 | 200 | 4 | 1/2"x1" | 9" | 1-13/16" | 3/4" | 8 | 7-1/2" | |
| 6" | 6.90 | UFA200-C-6-E | 10.7 | 200 | 8 | 1/2"x1" | 11" | 1-13/16" | 3/4" | 8 | 9-1/2" | |
| 8" | 9.05 | UFA200-C-8-E | 19.6 | 200 | 8 | 5/8"x1-1/4" | 13-1/2" | 2-1/4" | 22/25" | 8 | 11-3/4" | |
| 10" | 11.10 | UFA200-C-10-E | 25.3 | 175 | 12 | 5/8"x1-1/4" | 16" | 2-15/16" | 1" | 12 | 14-1/4" | |
| 12" | 13.20 | UFA200-C-12-E | 33.2 | 175 | 12 | 5/8"x1-1/4" | 19" | 2-15/16" | 1" | 12 | 17" | |

FEATURES

- Black fusion-bonded epoxy coating
- Restraint is provided by a set screw locking device similar to that used in mechanical joint retainer glands
- The gasket is an SBR mechanical joint gasket. Available with optional EPDM or NBR (Buna-N) gasket
- Designed for ease of on-site installation. Eliminates bolt hole alignment problems and allows for pipe deflection
- Series 200 adapter flanges are not recommended for use on PVC pipe. Use the Uni-Flange® Series 900 flanges instead
- Optional uni-torque set screws are available for use with Series 200 adapter flanges for ductile iron pipe, class 52-56. To order, add "-UT" to the catalog number. Example: UFA200-C-6-E-UT
- Optional stainless steel set screws, type 410 per ASTM F593, are available for Series 200 adapter flanges. To order, add "-SS" to the catalog number. Example: UFA200-C-6-E-SS.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: