



SUBMITTAL INFORMATION


Adapter Flange - (UFA900-C-x series)




UNI-FLANGE® SERIES 900 ADAPTER FLANGE FOR DUCTILE IRON PIPE O.D. PVC PIPE

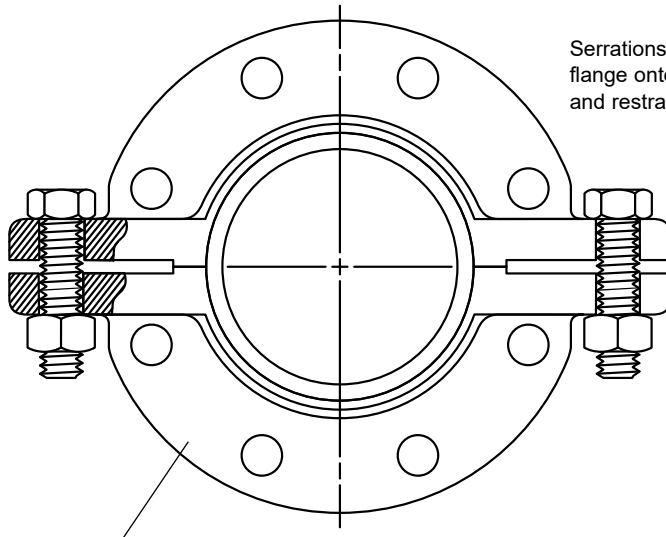

Serrations lock flange onto pipe and restrains pipe.



EPDM gasket creates a dual seal against face of mating flange and around pipe.

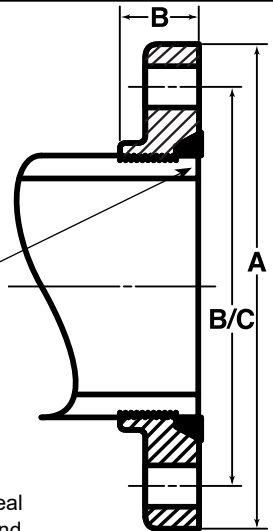

Flange - Ductile Iron ASTM A536 Grade 65-45-12
Finish: Shop coat
Color Code: Red for PVC with ductile iron pipe O.D.

NOM. PIPE SIZE	DUCTILE IRON PIPE		APPROX. WT. LBS.	DIMENSIONS			BOLT HOLE DIA.	No. OF BOLT HOLES	CLAMPING BOLTS		✓ SUBMITTED ITEM(S)
	OD (IN.)	CATALOG No.		OD A	THICKNESS B	BOLT CENTER BC			No.	SIZE	
4"	4.80	UFA900-C-4	12	9"	1-1/2"	7-1/2"	3/4"	8	2	5/8"x3"	
6"	6.90	UFA900-C-6	15	11"	1-9/16"	9-1/2"	7/8"	8	2	5/8"x3"	
8"	9.05	UFA900-C-8	24	13-1/2"	1-7/8"	11-3/4"	7/8"	8	2	3/4"x3-1/2"	
10"	11.10	UFA900-C-10	34	16"	2"	14-1/4"	1"	12	2	7/8"x5"	
12"	13.20	UFA900-C-12	57	19"	2-13/16"	17"	1"	12	2	7/8"x5"	

NOM. SIZE	PIPE STANDARD	TYPE	PRESSURE RATING (PSI)
4" - 12"	AWWA C-900	DR-14	200
		DR-18	150
		DR-25	100

FEATURES

- Flanges drilling ANSI B16.1 125 lb. / ANSI B16.5 150 lb
- Clamping bolts and nuts are SAE J429 grade 5, zinc-plated
- Gasket is EPDM rubber per ASTM D2000

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/01/20

Submitted By: