



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1300-CA-xx-I style)



SERIES 1300-C 14" - 42" RESTRAINT (WITH ACCESSORIES) FOR PVC PIPE AND MECHANICAL JOINT FITTINGS

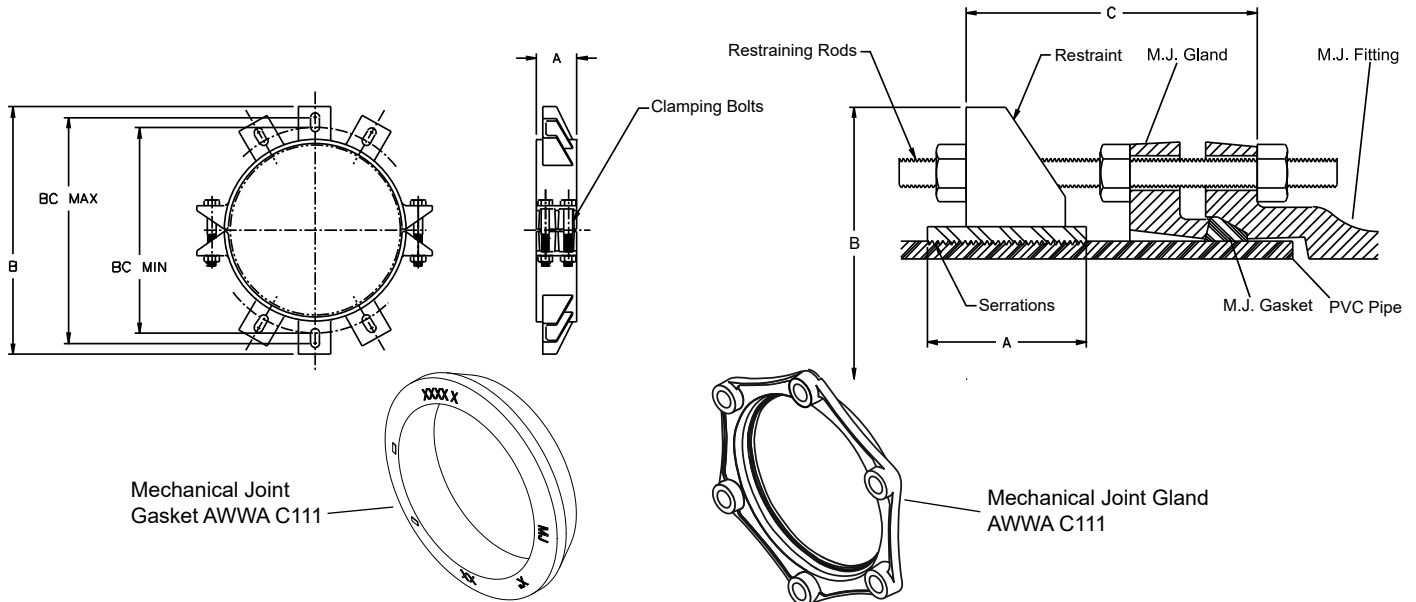

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1300-C		A	B APPROX	C MAX	RESTRAINING RODS		CLAMPING BOLTS		BC MIN	BC MAX	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD (In.)	CATALOG No.				QTY.	SIZE	QTY.	SIZE				
14"	15.30	UFR1300-CA-14-I	4"	22-7/16"	15"	6	3/4" x 17"	4	7/8" x 7"	18.50"	20.50"	65	
16"	17.40	UFR1300-CA-16-I	4"	24-5/8"	15"	6	3/4" x 17"	4	7/8" x 7"	20.50"	22.50"	68	
18"	19.50	UFR1300-CA-18-I	5"	26-7/16"	15"	8	3/4" x 17"	4	1" x 7"	22.75"	24.75"	93	
20"	21.60	UFR1300-CA-20-I	5"	29-5/32"	22"	8	3/4" x 24"	4	1-1/8" x 9"	25.00"	27.00"	125	
24"	25.80	UFR1300-CA-24-I	5"	33-5/8"	22"	12	3/4" x 24"	4	1-1/8" x 9"	29.50"	31.50"	162	
30"	32.00	UFR1300-CA-30-I	7"	40-7/8"	22"	12	1" x 24"	6	1-1/8" x 6"	36.19"	38.19"	250	
36"	38.30	UFR1300-CA-36-I	7"	48-1/4"	22"	12	1" x 24"	6	1-1/8" x 6"	42.50"	45.50"	300	
42"	44.50	UFR1300-CA-42-I	10-3/4"	57-7/16"	22"	16	1-1/4" x 24"	8	1-1/8" x 6"	49.13"	54.13"	487	

FEATURES

- Cast ductile iron per ASTM A536, grade 65-45-12
- 360° contact and support of the pipe wall
- Ideal companion for push-on fittings with restraint ears
- Rods (included) are high strength, low alloy steel ANSI / AWWA C111 / A21.11
- Clamping bolts and nuts - Grade 5, zinc plated
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Black epoxy coating - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



04/14/21

Submitted By: