




SUBMITTAL INFORMATION



Uni-Flange® Restraint (UFR1300-PA-x-I style)

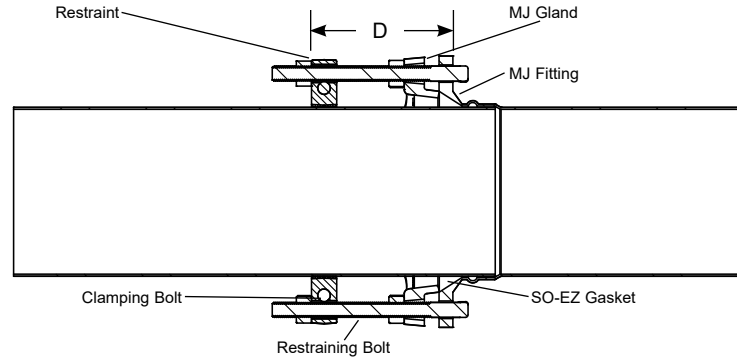


SERIES 1300-P 4" - 12" RESTRAINT DEVICE (WITH ACCESSORIES) FOR SEWER PIPE

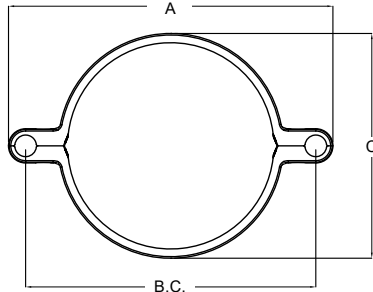

High Strength Low Alloy T-Bolts and Nuts
AWWA C111



Mechanical Joint Gland
AWWA C111



SO-EZ Gasket

NOM PIPE SIZE	SEWER PIPE OD STYLE 1300-P		A	B.C.	C	D MAX	RESTRAINING BOLTS		CLAMPING BOLTS		APPROX. WT. LBS.	✓ SUBMITTED ITEMS
	OD	CATALOG No.					No.	SIZE	No.	SIZE		
4"	4.22	UFR1300-PA-4-I	8-57/64"	7-1/2"	4-59/64"	6"	2	3/4" x 7"	2	5/8" x 2-1/4"	11.6	
6"	6.28	UFR1300-PA-6-I	10-57/64"	9-1/2"	6-63/64"	6"	2	3/4" x 7"	2	5/8" x 2-1/4"	17.0	
8"	8.40	UFR1300-PA-8-I	13-9/64"	11-3/4"	9-3/32"	6"	2	3/4" x 7"	2	5/8" x 2-1/4"	19.1	
10"	10.50	UFR1300-PA-10-I	15-23/64"	14"	11-29/64"	6"	2	3/4" x 7"	2	5/8" x 2-1/4"	26.5	
12"	12.50	UFR1300-PA-12-I	18"	16-1/4"	13-29/64"	6"	2	3/4" x 7"	2	5/8" x 2-1/4"	30.6	

FEATURES

- 4" - 12" sizes: cast ductile iron per ASTM A536 grade 65-45-12, black e-coat
- Clamping bolts and nuts - Grade 5, zinc-plated
- 360° contact and support of the pipe wall
- T-bolts and nuts (included) are high strength, low alloy steel ANSI / AWWA C111.
Optional: stainless steel
- Rated at 50 psi with a 2:1 safety factor
- Gasket - NBR (Buna-N) per ASTM D2000

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



05/04/21

Submitted By: