




SUBMITTAL INFORMATION

Uni-Flange® Restraint (*UFR1300X-P-x-U style*)

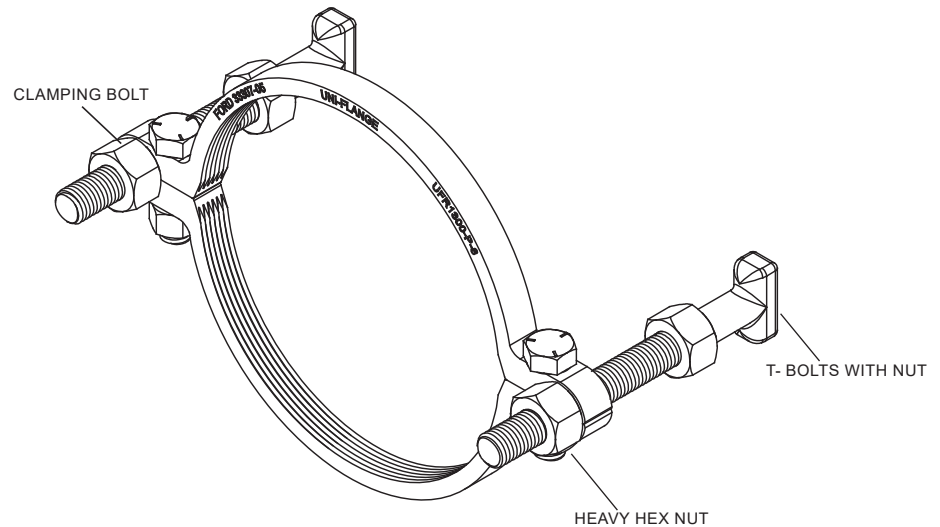

304 STAINLESS STEEL SERIES 1300-P RESTRAINT DEVICE FOR SEWER PIPE

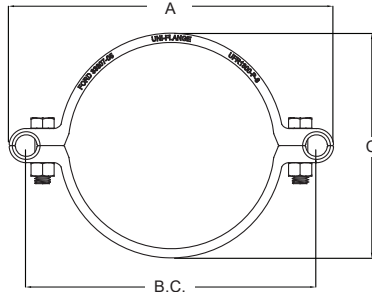

| NOM PIPE SIZE (IN.) | SEWER PIPE OD STYLE 1300-P | | A (IN.) | B.C. (IN.) | C (IN.) | RESTRAINING BOLTS | | CLAMPING BOLTS | | APPROX. WT. LBS. | ✓ SUBMITTED ITEMS |
|------------------------------|-------------------------------|-----------------|----------|---------------|----------|----------------------|-----------------|----------------|-----------------|---------------------|----------------------|
| | OD (IN.) | CATALOG No. | | | | No. D | SIZE E (IN.) | No. F | SIZE G (IN.) | | |
| 4 | 4.22 | UFR1300X-P-4-U | 8-57/64 | 7-1/2 | 4-59/64 | 2 | 3/4 x 7 | 2 | 1/2 x 2-1/4 | 4.9 | |
| 6 | 6.28 | UFR1300X-P-6-U | 10-57/64 | 9-1/2 | 6-63/64 | 2 | 3/4 x 7 | 2 | 1/2 x 2-1/4 | 5.3 | |
| 8 | 8.40 | UFR1300X-P-8-U | 13-9/64 | 11-3/4 | 9-3/32 | 2 | 3/4 x 7 | 2 | 1/2 x 2-1/4 | 5.7 | |
| 10 | 10.50 | UFR1300X-P-10-U | 15-23/64 | 14 | 11-29/64 | 2 | 3/4 x 7 | 2 | 1/2 x 2-1/4 | 8.6 | |
| 12 | 12.50 | UFR1300X-P-12-U | 18 | 16-1/4 | 13-29/64 | 2 | 3/4 x 7 | 2 | 1/2 x 2-1/4 | 9.8 | |

FEATURES

- Type 304 stainless steel per ASTM A240
- Clamping bolts and nuts - Type 304 stainless steel per ASTM A193 and A194
- 360° contact and support of the pipe wall
- T-bolts and nuts (included) - Type 304 stainless steel per ASTM A193 and A194
- Rated at 50 psi with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



09/24/24

Submitted By: