



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1309-C-x-I style)



UNI-FLANGE SERIES 1309-C RESTRAINT HARNESS FOR C900 PVC, C909 PVC AND C906 HDPE PIPE FOR MECHANICAL JOINT / PUSH-ON FITTINGS

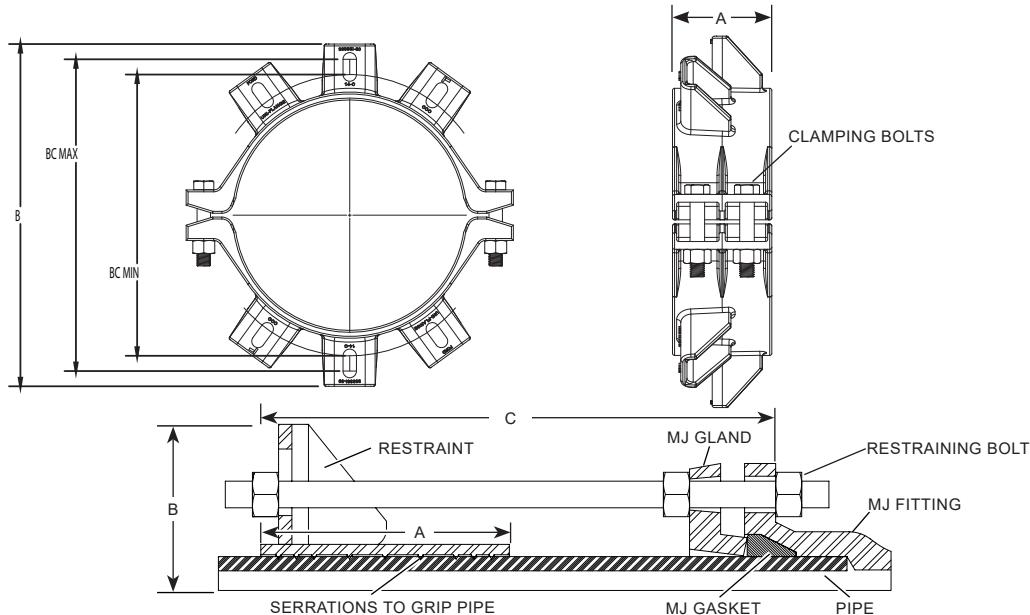

| Nom Pipe Size | PVC PIPE WITH DUCTILE IRON PIPE OD STYLE 1309-C | | A | B APPROX | C MAX | T-BOLTS | | CLAMPING BOLTS | | BC MIN | BC MAX | APPROX. WT. LBS. | ✓ SUBMITTED ITEMS |
|---------------------|---|----------------|----|-------------|----------|---------|------------|----------------|-----------|----------|----------|---------------------|----------------------|
| | OD (IN.) | CATALOG No | | | | No. | SIZE | No. | SIZE | | | | |
| 14" | 15.30 | UFR1309-C-14-I | 6" | 22-7/16" | 15" | 6 | 3/4" x 17" | 4 | 7/8" x 5" | 18-7/16" | 20-7/16" | 85.64 | |
| 16" | 17.40 | UFR1309-C-16-I | 6" | 24-35/64" | 15" | 6 | 3/4" x 17" | 4 | 7/8" x 5" | 20-1/2" | 22-1/2" | 91.18 | |
| 18" | 19.50 | UFR1309-C-18-I | 7" | 26-33/64" | 15" | 8 | 3/4" x 17" | 4 | 7/8" x 5" | 22-5/8" | 24-5/8" | 101.62 | |

FEATURES

- Cast ductile iron per ASTM A536 grade 65-45-12
- T-bolts included are high strength, low alloy weathering steel per ANSI / AWWA C111 / A21.11.
- Side clamping bolts and nuts are SAE Grade 5
- Rated at full-rated pressure of any class of C900 and C909 PVC pipe, minimum 2:1 safety factor
- Rated at full-rated pressure of any class of C906 HDPE pipe (provided an insert is used)
- E-coat applied epoxy
- 360° contact and support of the pipe wall
- Designed to accommodate push-on fittings with restraining ears
- Staggered tie rod lug design distributes forces and minimizes stress on the pipe wall

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: