



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1309-C-xx-U style)



10" - 24" UNI-FLANGE SERIES 1309-C RESTRAINT DEVICE FOR C900 AND C909 PVC PIPE, C906 HDPE FOR MECHANICAL JOINT / PUSH-ON FITTINGS

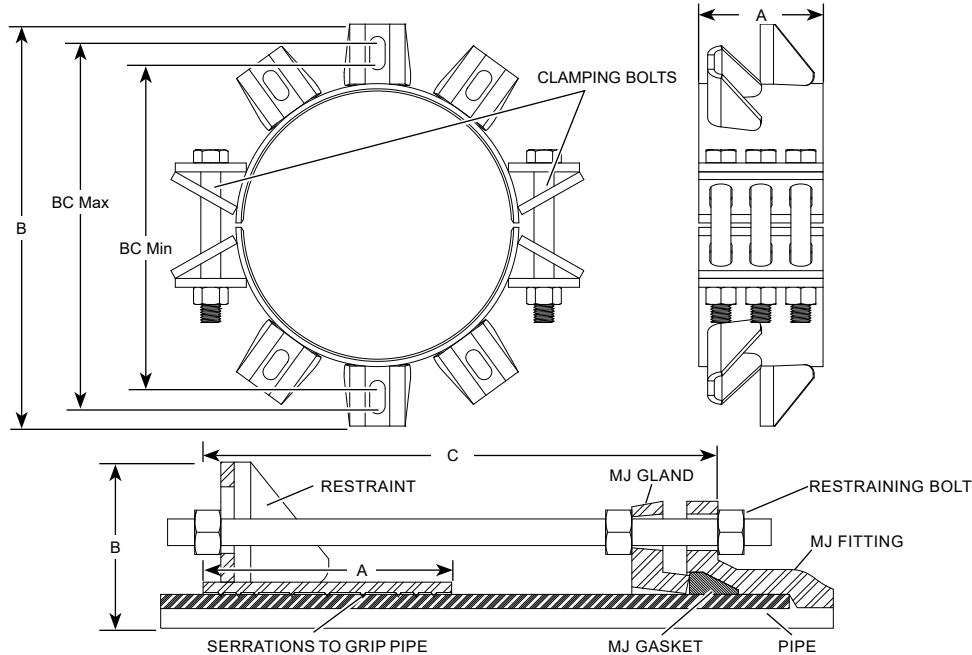

NOM PIPE SIZE	PVC PIPE WITH DUCTILE IRON PIPE OD STYLE 1309-C		A	B APPROX	C MAX	RESTRAINING BOLTS		CLAMPING BOLTS		BC MIN	BC MAX	APPROX. WT. LBS.	✓ SUBMITTED ITEMS
	OD (IN.)	CATALOG No				No.	SIZE	No.	SIZE				
10"	11.10	UFR1309-C-10-U	4"	18-39/64"	7"	4	3/4" x 9"	2	7/8" x 7"	14.53"	16.53"	48.66	
12"	13.20	UFR1309-C-12-U	4"	20-1/2"	7"	4	3/4" x 9"	2	7/8" x 7"	16.63"	18.63"	52.42	
14"	15.30	UFR1309-C-14-U	7"	22-41/64"	15"	6	3/4" x 17"	6	1-1/8" x 9"	18.44"	20.44"	113.16	
16"	17.40	UFR1309-C-16-U	7"	24-49/64"	15"	6	3/4" x 17"	6	1-1/8" x 9"	20.56"	22.56"	119.74	
18"	19.50	UFR1309-C-18-U	7"	26-3/4"	15"	8	3/4" x 17"	6	1-1/8" x 9"	22.63"	24.63"	131.23	
20"	21.60	UFR1309-C-20-U	10"	28-49/64"	22"	8	3/4" x 24"	6	1-1/8" x 9"	24.73"	26.73"	144.21	
24"	25.80	UFR1309-C-24-U	10"	33-1/8"	22"	12	3/4" x 24"	6	1-1/8" x 9"	29.06"	31.06"	185.17	

FEATURES

- Manufactured from carbon steel per ASTM A36
- T-bolts, bolts and nuts (included) are high strength, low alloy steel ANSI / AWWA C111 / A21.11
- Staggered tie rod lug positioning for high performance
- Rated at full working pressure of any class of C900 PVC, minimum 2:1 safety factor
- Rated at 235 psi on C909 PVC, minimum 2:1 safety factor
- Rated at full-rated pressure of any class of C906 HDPE pipe (provided an insert is used)
- Coating - Black alkyd enamel shop coat (NSF61 approved)
- 360° contact and support of the pipe wall

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

12/14/20

Submitted By: