




SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1350-C-x-RB-U style)

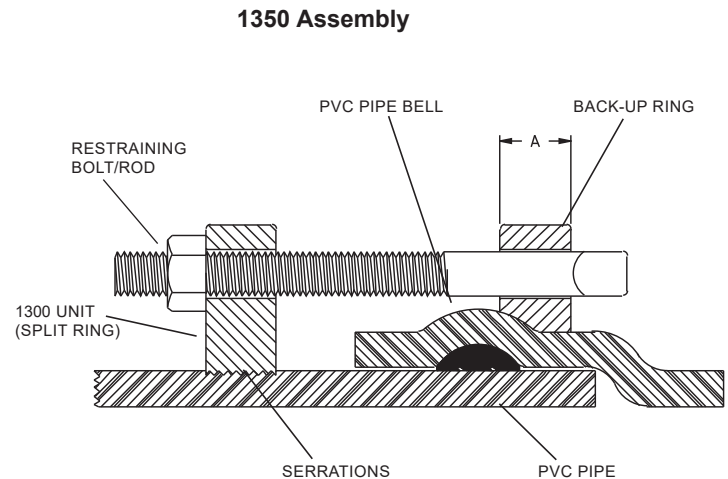

4" - 12" UNI-FLANGE SERIES 1350-C RESTRAINT HARNESS FOR PVC PIPE BELL WITH BLUE FLUOROCARBON-COATED ACCESSORIES

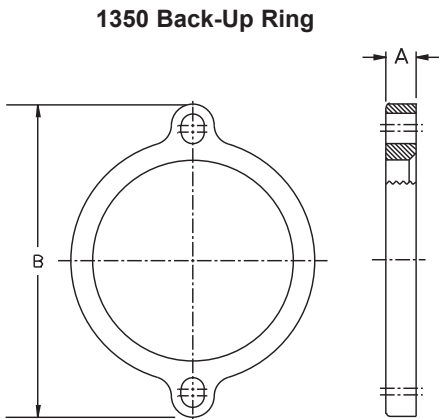

NOM. PIPE SIZE	OD (IN.)	CATALOG No.	A	B APPROX.	RESTRAINT BOLTS	RESTRAINT CLAMPING BOLTS	MAX BELL CLEARANCE	APPROX. WEIGHT LBS	✓ SUBMITTED ITEMS
4"	4.80	UFR1350-C-4-RB-U	1-1/8"	9-1/8"	(2) 3/4" x 9"	(2) 5/8" x 3-1/2"	6.63"	13.0	
6"	6.90	UFR1350-C-6-RB-U	1-1/8"	11-7/8"	(2) 3/4" x 9"	(2) 5/8" x 3-1/2"	8.63"	17.2	
8"	9.05	UFR1350-C-8-RB-U	1-1/4"	14-5/8"	(2) 3/4" x 12"	(2) 3/4" x 4"	12.13"	26.0	
10"	11.10	UFR1350-C-10-RB-U	1-3/8"	16-5/8"	(4) 3/4" x 17"	(2) 7/8" x 5"	14.13"	45.5	
12"	13.20	UFR1350-C-12-RB-U	1-3/4"	19-7/8"	(4) 3/4" x 17"	(2) 7/8" x 5"	16.75"	52.0	

FEATURES

- Split ring restraint - Ductile iron per ASTM A536, grade 65-45-12
- Back-up ring - Ductile iron per ASTM A536, grade 65-45-12
- T-bolts / rods (included) - High strength, low alloy steel (AWWA C111) with blue fluorocarbon coating
- Side clamping nuts and bolts - Grade 5 with blue fluorocarbon coating
- Rated at full-rated pressure for most of PVC pipe, minimum 2:1 safety factor
 - Not recommended for use on AWWA C900, DR14 PVC pipe (use Series 1390)
- Black e-coat epoxy coating - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



03/22/22

Submitted By: