



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1350-C-xx-Q-U style)



SERIES 1350-C RESTRAINT HARNESS FOR PVC PIPE BELL AND SPIGOT JOINTS WITH 316 STAINLESS STEEL HARDWARE

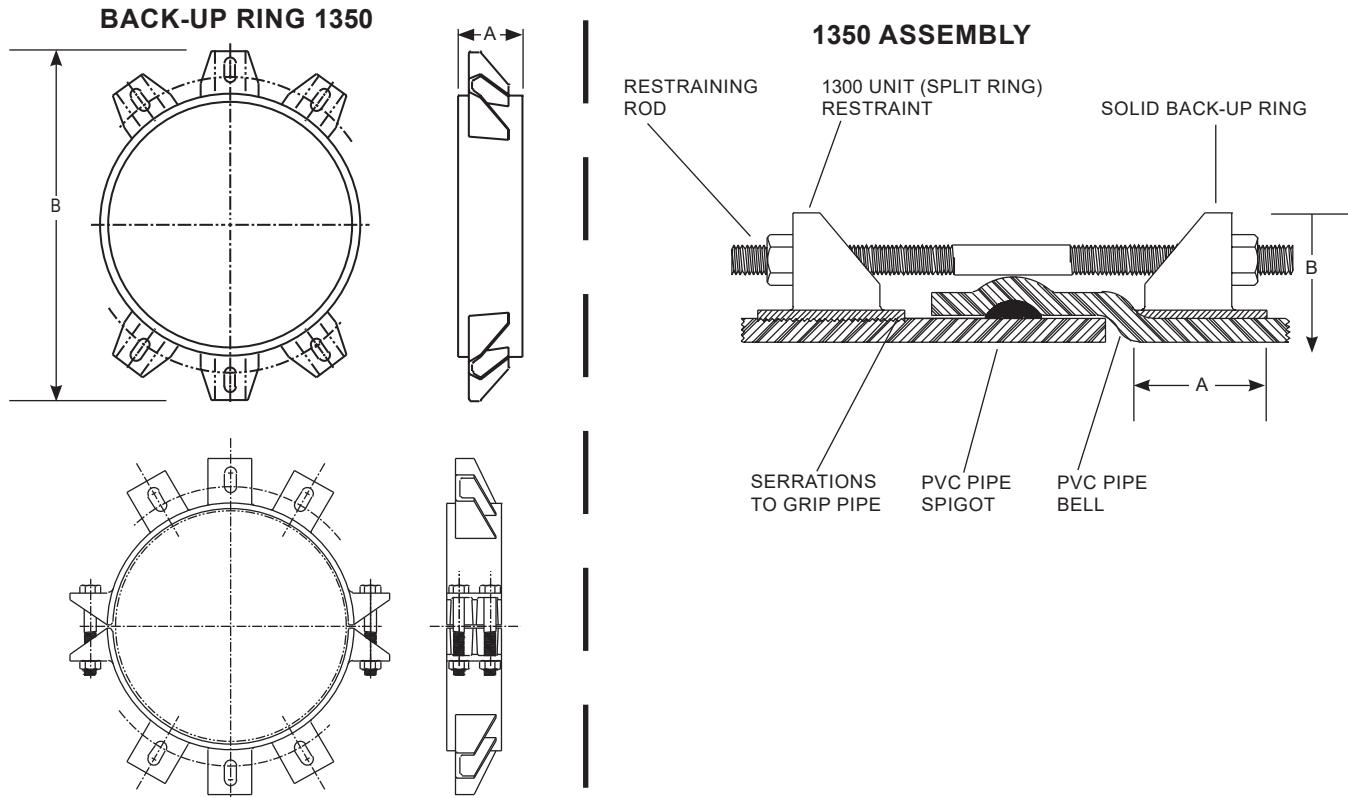

NOM PIPE SIZE (IN.)	OD (IN.)	CATALOG NUMBER	A (IN.)	B APPROX. (IN.)	RESTRAINT RODS (IN.)	RESTRAINT CLAMPING BOLTS (IN.)	MAX BELL CLEARANCE (IN.)	APPROX. WEIGHT LBS	✓ SUBMITTED ITEMS
14	15.30	UFR1350-C-14-Q-U	4	23-3/16	(6) 3/4 x 24	(4) 7/8 x 7	19.56	118.0	
16	17.40	UFR1350-C-16-Q-U	4	25-1/2	(6) 3/4 x 24	(4) 7/8 x 5	21.63	127.0	
18	19.50	UFR1350-C-18-Q-U	4	27-5/8	(8) 3/4 x 24	(4) 1 x 7	23.75	166.0	
20	21.60	UFR1350-C-20-Q-U	7	29-3/4	(8) 3/4 x 30	(4) 1 x 7	25.88	238.5	
24	25.80	UFR1350-C-24-Q-U	7	33-15/16	(12) 3/4 x 36	(4) 1 x 7	30.00	304.5	
30	32.00	UFR1350-C-30-Q-U	10	42-1/2	(12) 1 x 24	(6) 1-1/8 x 9	38.18	479.6	
36	38.30	UFR1350-C-36-Q-U	10	48-39/64	(12) 1 x 36	(6) 1-1/8 x 9	45.06	537.0	

Note: For DR18, please contact factory for more information.

FEATURES

- Split ring restraint - Ductile iron per ASTM A536, grade 65-45-12 or ASTM A36 carbon steel
- Back-up ring - Ductile iron per ASTM A536, grade 65-45-12 or ASTM A36 carbon steel
- Rods, side clamping bolts and nuts - Type 316 stainless steel per ASTM A193 and A194
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Finish - Shop coat - NSF 61 certified

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



Submitted By:

09/16/25