



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1350-C-xx-RB-U style)



SERIES 1350-C RESTRAINT HARNESS (WITH BLUE FLUOROCARBON-COATED HARDWARE) FOR PVC PIPE BELL AND SPIGOT JOINTS

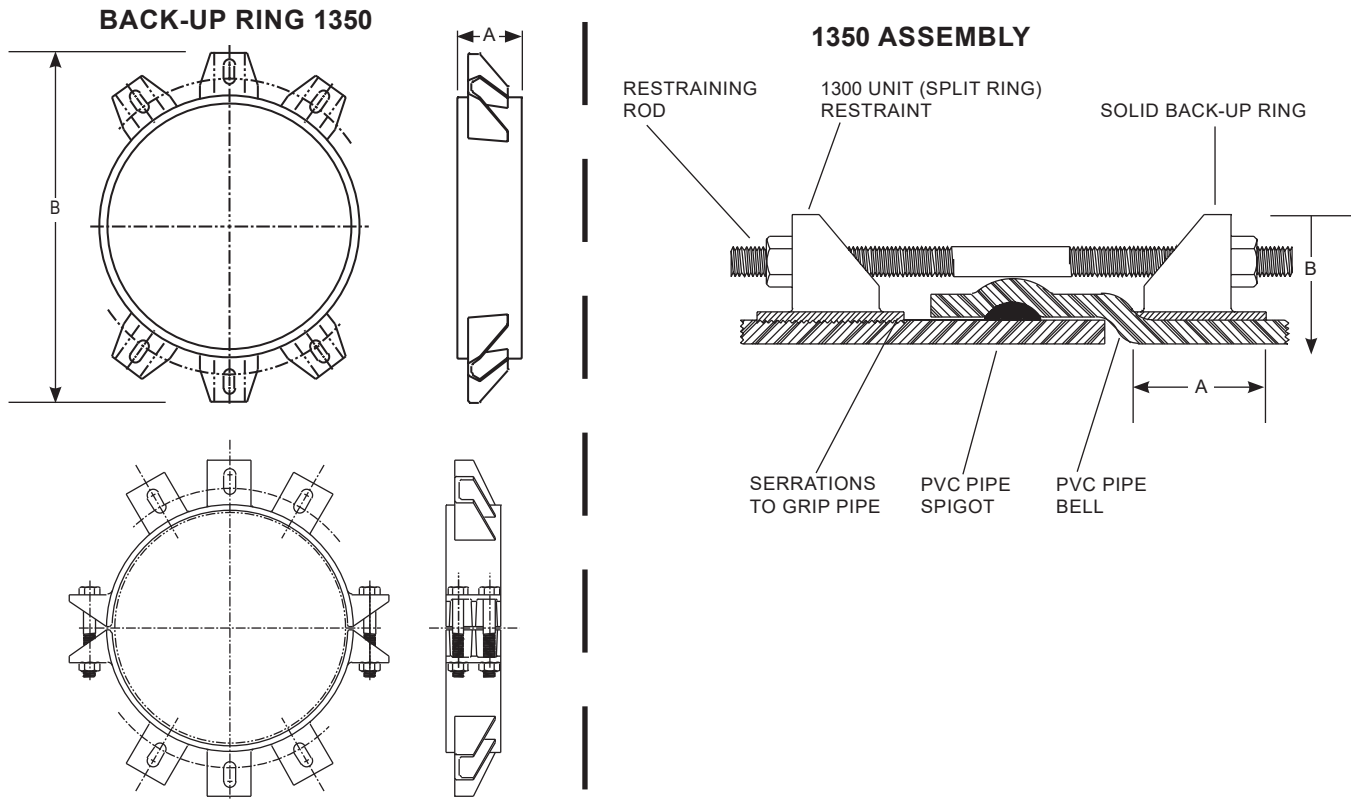

NOM PIPE SIZE	OD (IN.)	CATALOG NUMBER	A	B APPROX.	RESTRAINT RODS	RESTRAINT CLAMPING BOLTS	MAX BELL CLEARANCE	APPROX. WEIGHT LBS	✓ SUBMITTED ITEMS
14"	15.30	UFR1350-C-14-RB-U	4"	23-3/16"	(6) 3/4" x 24"	(4) 7/8" x 7"	19.56"	118.0	
16"	17.40	UFR1350-C-16-RB-U	4"	25-1/2"	(6) 3/4" x 24"	(4) 7/8" x 5"	21.63"	127.0	
18"	19.50	UFR1350-C-18-RB-U	4"	27-5/8"	(8) 3/4" x 24"	(4) 1" x 7"	23.75"	166.0	
20"	21.60	UFR1350-C-20-RB-U	7"	29-3/4"	(8) 3/4" x 30"	(4) 1" x 7"	25.88"	238.5	
24"	25.80	UFR1350-C-24-RB-U	7"	33-15/16"	(12) 3/4" x 36"	(4) 1" x 7"	30.00"	304.5	
30"	32.00	UFR1350-C-30-RB-U	10"	42-1/2"	(12) 1" x 24"	(6) 1-1/8" x 9"	38.18"	479.6	
36"	38.30	UFR1350-C-36-RB-U	10"	48-39/64"	(12) 1" x 36"	(6) 1-1/8" x 9"	45.06"	537.0	

Note: For DR18, please contact factory for more information.

FEATURES

- Split ring restraint - Ductile iron per ASTM A536, grade 65-45-12 or ASTM A36 carbon steel
- Back-up ring - Ductile iron per ASTM A536, grade 65-45-12 or ASTM A36 carbon steel
- Rods (included) - High strength, low alloy steel per ANSI / AWWA C111/A21.11 with blue fluorocarbon coating
- Side clamping nuts and bolts - Grade 5 with blue fluorocarbon coating
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Coating - Shop coat - NSF 61 certified

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com



10/10/23

Submitted By: