



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR1350-C-xx-X-I style)




### SERIES 1350-C RESTRAINT HARNESS (WITH 304 STAINLESS STEEL HARDWARE) FOR PVC PIPE BELL AND SPIGOT JOINTS

**BACK-UP RING 1350**

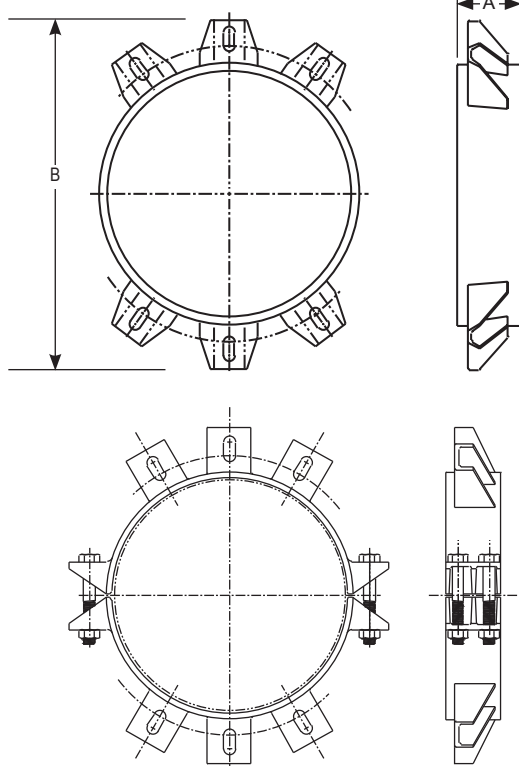

**1350 ASSEMBLY**

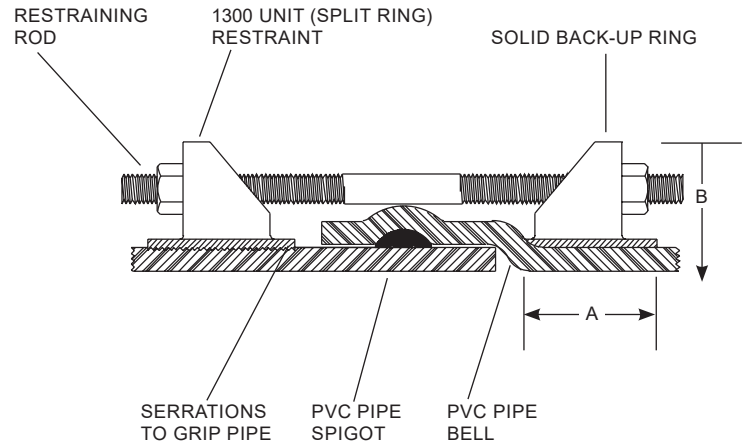

NOM. PIPE SIZE	OD (IN.)	CATALOG No.	A	B APPROX.	RESTRAINT RODS	RESTRAINT CLAMPING BOLTS	MAX BELL CLEARANCE	APPROX. WEIGHT LBS	✓ SUBMITTED ITEMS
14"	15.30	UFR1350-C-14-X-I	4"	23-3/16"	(6) 3/4" x 24"	(4) 7/8" x 7"	19.63"	112.0	
16"	17.40	UFR1350-C-16-X-I	4"	25-1/2"	(6) 3/4" x 24"	(4) 7/8" x 7"	21.63"	117.0	
18"	19.50	UFR1350-C-18-X-I	4"	27-5/8"	(8) 3/4" x 24"	(4) 1" x 7"	23.88"	152.0	
20"	21.60	UFR1350-C-20-X-I	7"	29-3/4"	(8) 3/4" x 30"	(4) 1-1/8" x 9"	26.13"	217.0	
24"	25.80	UFR1350-C-24-X-I	7"	33-15/16"	(12) 3/4" x 36"	(4) 1-1/8" x 9"	30.63"	280.5	
30"	32.00	UFR1350-C-30-X-I	7"	42-1/2"	(12) 1" x 24"	(6) 1-1/8" x 6"	38.18"	377.5	
36"	38.30	UFR1350-C-36-X-I	7"	48-39/64"	(12) 1" x 36"	(6) 1-1/8" x 6-3/4"	45.06"	418.0	

**Note:** For DR18, please contact factory for more information.

### FEATURES

- Split ring restraint - Ductile iron per ASTM A536, grade 65-45-12, epoxy coated (NSF 61 certified)
- Back-up ring - Ductile iron per ASTM A536, grade 65-45-12 or carbon steel per ASTM A36, shop coat (NSF 61 certified)
- Rods, side clamping nuts and bolts (included) - Type 304 stainless steel per ASTM A193 and ASTM A194
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com



10/10/23

Submitted By: