



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR1350-S-x-X-I style)




### SERIES 1350-S RESTRAINT HARNESS (WITH 304 STAINLESS STEEL HARDWARE) FOR 2"-12" STEEL-SIZED PVC PIPE JOINTS

1350 Back-Up Ring

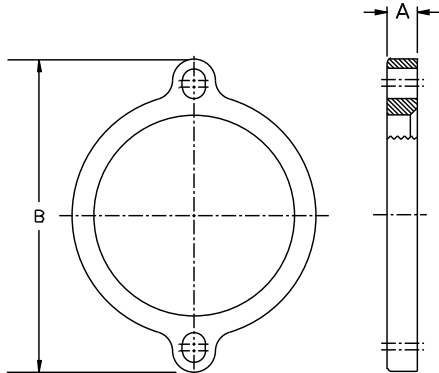

1350 Assembly

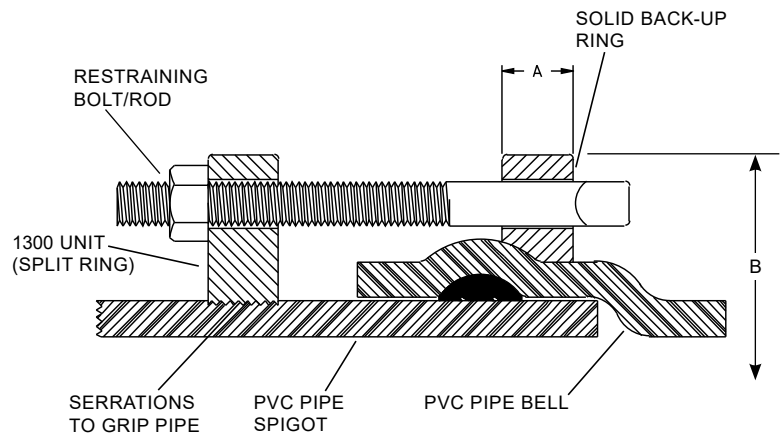

NOM. PIPE SIZE	OD (IN.)	CATALOG No.	A	B APPROX.	RESTRAINING BOLTS / RODS	RESTRAINT CLAMPING BOLTS	MAX BELL CLEARANCE (IN.)	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEMS
2"	2.38	UFR1350-S-2-X-I	1-1/8"	6-1/4"	(2) 5/8" x 5"	(2) 5/8" x 3-1/2"	4.00"	8.5	
3"	3.50	UFR1350-S-3-X-I	1-1/8"	7-5/8"	(2) 5/8" x 5"	(2) 5/8" x 3-1/2"	5.44"	10.5	
4"	4.50	UFR1350-S-4-X-I	1-1/8"	9-1/8"	(2) 3/4" x 9"	(2) 5/8" x 3-1/2"	6.63"	13.5	
6"	6.63	UFR1350-S-6-X-I	1-1/8"	11-7/8"	(2) 3/4" x 9"	(2) 5/8" x 3-1/2"	8.63"	17.5	
8"	8.63	UFR1350-S-8-X-I	1-1/4"	14-5/8"	(2) 3/4" x 12"	(2) 3/4" x 4"	11.88"	26.5	
10"	10.75	UFR1350-S-10-X-I	1-3/8"	16-5/8"	(4) 3/4" x 17"	(2) 7/8" x 5"	14.13"	42.5	
12"	12.75	UFR1350-S-12-X-I	1-3/8"	19-1/4"	(4) 3/4" x 17"	(2) 7/8" x 5"	16.75"	54.0	

### FEATURES

- Split ring restraint - Ductile iron per ASTM A536, grade 65-45-12
- Back-up ring - Ductile iron per ASTM A536, grade 65-45-12
- T-Bolts / rods, side clamping bolts and nuts (included) - 304 stainless steel per ASTM A193 and ASTM A194
- Rated at full-rated pressure of any class PVC pipe (steel-size) with a minimum 2:1 safety factor
- Black e-coat epoxy coating (NSF 61 approved) with painted gray top coat for identification

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com



08/10/20

Submitted By: