



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1350-S-xx-X-U style)



SERIES 1350-S 14" - 24" RESTRAINT HARNESS (WITH 304 STAINLESS STEEL HARDWARE) FOR STEEL SIZE PVC PIPE BELL AND SPIGOT JOINTS

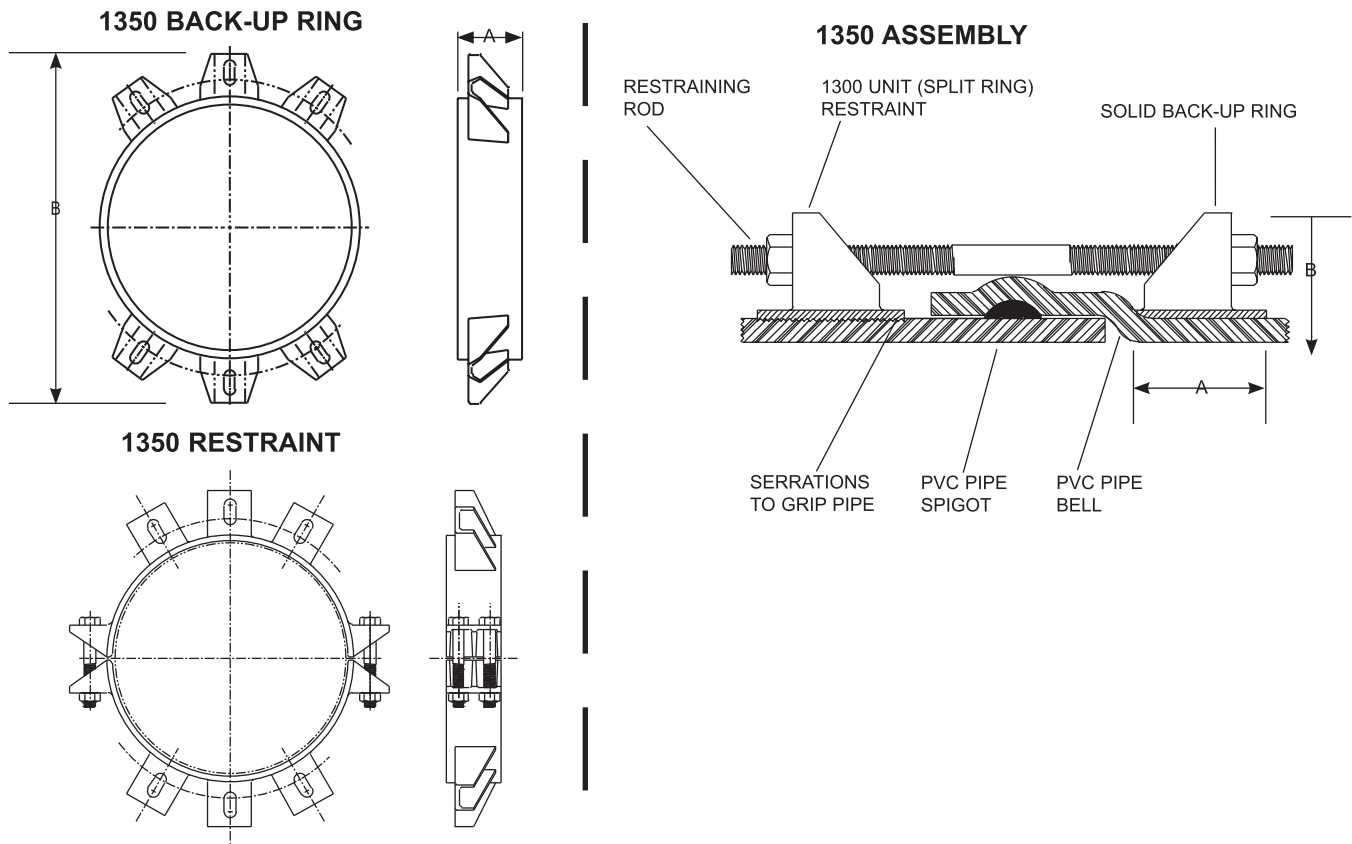

NOM. PIPE SIZE	OD (IN.)	CATALOG No.	A	B APPROX.	RESTRAINING BOLTS / RODS	RESTRAINT CLAMPING BOLTS	MAX BELL CLEARANCE (IN.)	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEMS
14"	14.00	UFR1350-S-14-X-U	4"	22-1/8"	(6) 3/4" x 24"	(4) 7/8" x 7"	18.25	103.5	
16"	16.00	UFR1350-S-16-X-U	4"	24-1/8"	(6) 3/4" x 24"	(4) 7/8" x 7"	20.22	117.5	
18"	18.00	UFR1350-S-18-X-U	4"	26-1/8"	(8) 3/4" x 24"	(4) 1" x 7"	22.84	142.5	
20"	20.00	UFR1350-S-20-X-U	7"	28-1/8"	(8) 3/4" x 30"	(4) 1" x 7"	24.25	200.0	
24"	24.00	UFR1350-S-24-X-U	7"	32-1/8"	(12) 3/4" x 36"	(4) 1" x 7"	28.25	293.0	

Note: For DR18, longer rods may be required. Please contact factory for more information.

FEATURES

- Split ring restraint - Fabricated from ASTM A36 carbon steel
- Back-up ring - Fabricated from carbon steel per ASTM A36
- Rods, clamping bolts and nuts (included) - Type 304 stainless steel per ASTM A193 and ASTM A194
- Rated at full-rated pressure of any class of steel size PVC pipe, minimum 2:1 safety factor
- Coating: Black shop coat (NSF 61 approved) with gray topcoat for identification purposes

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



09/14/20

Submitted By: