



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR1355-C-x-RB-U style)




### 4"-12" SERIES 1355-C RESTRAINT HARNESS FOR C900 PVC PIPE BELL JOINTS WITH BLUE FLUOROCARBON-COATED ACCESSORIES

#### 1300 SPLIT RESTRAINT

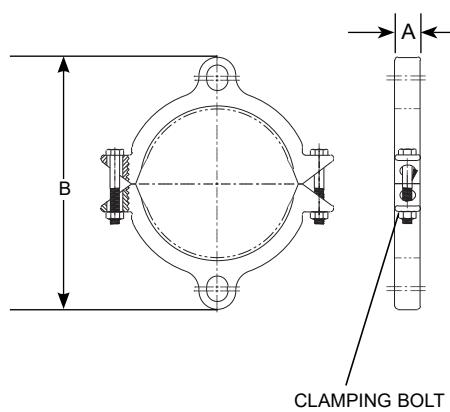

#### 1355 ASSEMBLY

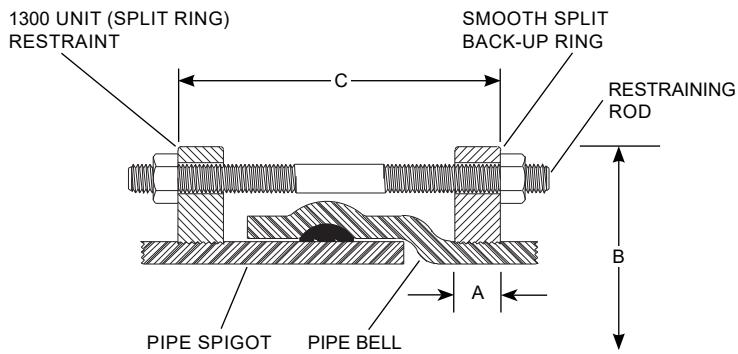

NOM PIPE SIZE	OD (IN.)	CATALOG NUMBER.	A	B APPROX	C MAX	RESTRAINT RODS		CLAMPING BOLTS		MAX BELL CLEARANCE	APPROX. Wt. LBS.	✓SUBMITTED ITEM(S)
						No.	SIZE	No.	SIZE			
4"	4.80	UFR1355-C-4-RB-U	1-1/8"	9-1/8"	15"	2	3/4" x 17"	4	5/8" x 3-1/2"	6-5/8"	17.0	
6"	6.90	UFR1355-C-6-RB-U	1-1/8"	11-1/8"	15"	2	3/4" x 17"	4	5/8" x 3-1/2"	8-5/8"	18.5	
8"	9.05	UFR1355-C-8-RB-U	1-1/4"	14-5/8"	15"	2	3/4" x 17"	4	3/4" x 4"	12-1/8"	29.0	
10"	11.10	UFR1355-C-10-RB-U	1-3/8"	16-5/8"	22"	4	3/4" x 24"	4	7/8" x 5"	14-1/8"	53.0	
12"	13.20	UFR1355-C-12-RB-U	1-3/8"	19-1/4"	22"	4	3/4" x 24"	4	7/8" x 5"	16-3/4"	56.5	

#### FEATURES

- Cast ductile iron per ASTM A536, Grade 65-45-12
- Restraining rods are high strength, low alloy steel per ANSI / AWWA C111 / A21.11 with blue fluorocarbon coating
- Side clamping bolts and nuts - Grade 5 with blue fluorocarbon coating
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Rated for 150 psi on ductile iron pipe up to 10". Rated for 125 psi on 12" size
- 360° contact and support of the pipe wall

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

[www.fordmeterbox.com](http://www.fordmeterbox.com)



Submitted By:

08/26/20