



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1355-C-x-X-U100 style)




**SERIES 1355-C RESTRAINT HARNESS (WITH 304 STAINLESS STEEL HARDWARE)
FOR C900 PVC PIPE OR DUCTILE IRON BELL JOINTS, HAVING DUCTILE IRON PIPE O.D. CAST SIZES 4" - 12"**

1300 SPLIT RESTRAINT

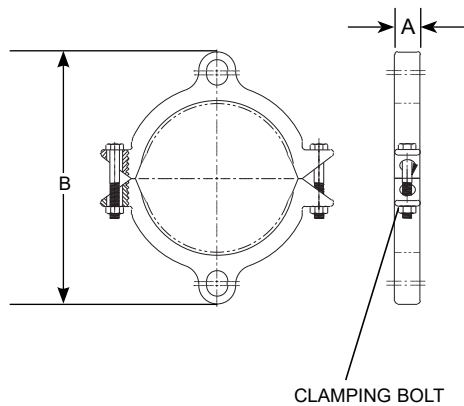

1355 ASSEMBLY

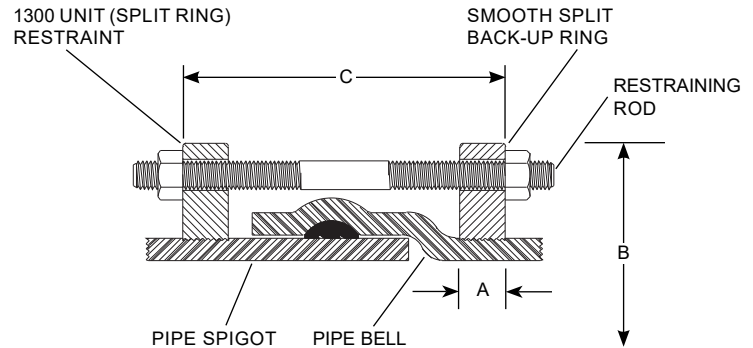

NOM PIPE SIZE	OD (IN.)	CATALOG NUMBER	A	B APPROX	C MAX	RESTRAINT RODS		CLAMPING BOLTS		MAX BELL CLEARANCE	APPROX. WT. LBS.	✓SUBMITTED ITEM(S)
						No.	SIZE	No.	SIZE			
4"	4.80	UFR1355-C-4-X-U100	1-1/8"	9-1/8"	15"	2	3/4" x 17"	4	5/8" x 3-1/2"	6-5/8"	17.0	
6"	6.90	UFR1355-C-6-X-U100	1-1/8"	11-1/8"	15"	2	3/4" x 17"	4	5/8" x 3-1/2"	8-5/8"	18.5	
8"	9.05	UFR1355-C-8-X-U100	1-1/4"	14-5/8"	15"	2	3/4" x 17"	4	3/4" x 4"	12-1/8"	29.0	
10"	11.10	UFR1355-C-10-X-U100	1-3/8"	16-5/8"	22"	4	3/4" x 24"	4	7/8" x 5"	14-1/8"	53.0	
12"	13.20	UFR1355-C-12-X-U100	1-3/8"	19-1/4"	22"	4	3/4" x 24"	4	7/8" x 5"	16-3/4"	56.5	

FEATURES

- Cast ductile iron per ASTM A536 grade 65-45-12
- Restraining rods, clamping bolts and nuts - Type 304 stainless steel per ASTM A193 and A194
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Rated for 150 psi on ductile iron pipe up to 10". Rated for 125 psi on 12" size
- 360° contact and support of the pipe wall
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



12/18/20

Submitted By: