



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1360-C-x-Q-I style)




**UNI-FLANGE 1360-C RESTRAINT HARNESS (WITH 316 STAINLESS STEEL HARDWARE)
FOR PVC PIPE AND PRESSURE FITTINGS PIPE SIZES 4"- 8"**

1360 Back-Up Ring

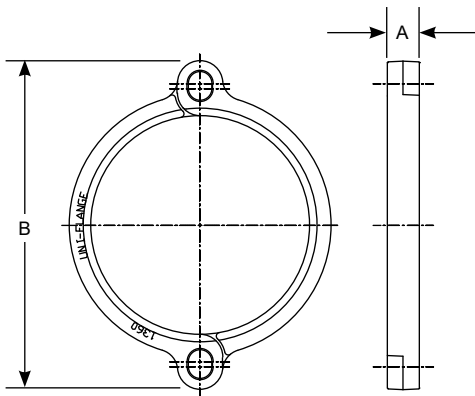

1360 Assembly

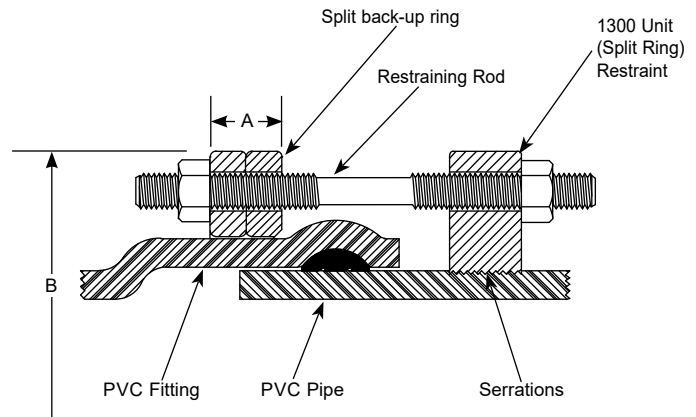

NOM. PIPE SIZE	OD (IN.)	CATALOG NUMBER	BACK-UP RING		RESTRAINING RODS	RESTRAINT CLAMPING BOLTS	MAX BELL CLEARANCE (IN.)	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEM(S)
			A	B APPROX.					
4"	4.8	UFR1360-C-4-Q-I	1-1/8"	9-1/8"	(2) 3/4" x 12"	(2) 5/8" x 3-1/2"	6.63	12.7	
6"	6.9	UFR1360-C-6-Q-I	1-1/8"	11-7/8"	(2) 3/4" x 12"	(2) 5/8" x 3-1/2"	8.63	17.6	
8"	9.05	UFR1360-C-8-Q-I	1-1/8"	14-5/8"	(2) 3/4" x 12"	(2) 3/4" x 4"	12.13	24	

FEATURES

- Split ring restraint and split back-up ring cast of 65-45-12 grade ductile iron per ASTM A536 - Armorguard e-coat applied epoxy (NSF 61 approved)
- Rods, clamping bolts and nuts (included) - Type 316 stainless steel per ASTM A193 and A194
- Rated to a maximum working pressure of 235 psi, minimum 2:1 safety factor
- Fits standard C907 fittings

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

08/14/20

Submitted By: