



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR1360-C-xx-xxxx-E3-I style)



### SERIES 1360-C 14" - 42" RESTRAINT HARNESS FOR PVC PIPE PRESSURE FITTINGS

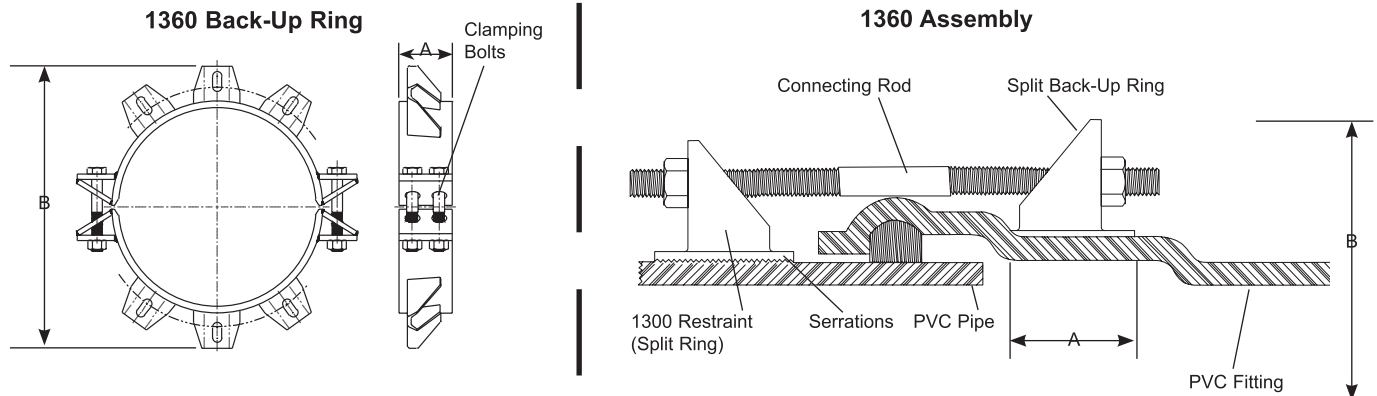

| NOM. PIPE SIZE | OD (In.) | CATALOG NUMBER         | BACK-UP RING |            | CONNECTING RODS   | RESTRAINT CLAMPING BOLTS | BACKUP RING CLAMPING BOLTS | APPROX. WEIGHT LBS. | ✓ SUBMITTED ITEMS |
|----------------|----------|------------------------|--------------|------------|-------------------|--------------------------|----------------------------|---------------------|-------------------|
|                |          |                        | A            | *B APPROX. |                   |                          |                            |                     |                   |
| 14"            | 15.3     | UFR1360-C-14-xxxx-E3-I | 4"           | 24-3/4"    | (6) 3/4" x 24"    | (4) 7/8" x 7"            | (4) 7/8" x 7"              | 122.5               |                   |
| 16"            | 17.4     | UFR1360-C-16-xxxx-E3-I | 4"           | 27-1/4"    | (6) 3/4" x 30"    | (4) 7/8" x 7"            | (4) 7/8" x 7"              | 130.5               |                   |
| 18"            | 19.5     | UFR1360-C-18-xxxx-E3-I | 4"           | 29-1/4"    | (8) 3/4" x 30"    | (4) 1" x 7"              | (4) 7/8" x 7"              | 167                 |                   |
| 20"            | 21.6     | UFR1360-C-20-xxxx-E3-I | 5"           | 32-3/4"    | (8) 3/4" x 30"    | (4) 1-1/8" x 9"          | (4) 1" x 7"                | 213                 |                   |
| 24"            | 25.8     | UFR1360-C-24-xxxx-E3-I | 5"           | 37-3/4"    | (12) 3/4" x 36"   | (4) 1-1/8" x 9"          | (4) 1" x 7"                | 301.6               |                   |
| 30"            | 32       | UFR1360-C-30-xxxx-E3-I | 7"           | 42-3/4"    | (12) 1" x 40"     | (6) 1-1/8" x 6"          | (6) 1-1/8" x 9"            | 460                 |                   |
| 36"            | 38.3     | UFR1360-C-36-xxxx-E3-I | 7"           | 49-3/4"    | (12) 1" x 40"     | (6) 1-1/8" x 6"          | (6) 1-1/8" x 9"            | 520                 |                   |
| 42"            | 44.5     | UFR1360-C-42-xxxx-E3-I | 7"           | 55"        | (16) 1-1/4" x 52" | (8) 1-1/8" x 6"          | (6) 1-1/8" x 9"            | 1025                |                   |

\*These are approximate dimensions. Dimensions are dependent on the bell run O.D.

**Note:** Bell run O.D. and pipe manufacturer are required when ordering.

Supply bell run outside diameter with order for units 10" and larger.



### FEATURES

- Split ring restraint cast of 65-45-12 grade ductile iron per ASTM A536 - E-coat epoxy (NSF 61 approved)
- Split back-up ring fabricated of carbon steel per ASTM A36 - E-coat epoxy
- Rods (included) - High strength, low alloy steel per ANSI/AWWA C111/A21.11
- Side clamping nuts and bolts - Grade 5, zinc plated
- Rated at full-rated pressure of any class PVC pipe, minimum 2:1 safety factor
- Fits standard C907 fittings

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com



09/14/20

Submitted By: