



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1360-C-xx-xxxx-Y-U style)



SERIES 1360-C 14" - 36" RESTRAINT HARNESS FOR PVC PIPE PRESSURE FITTINGS

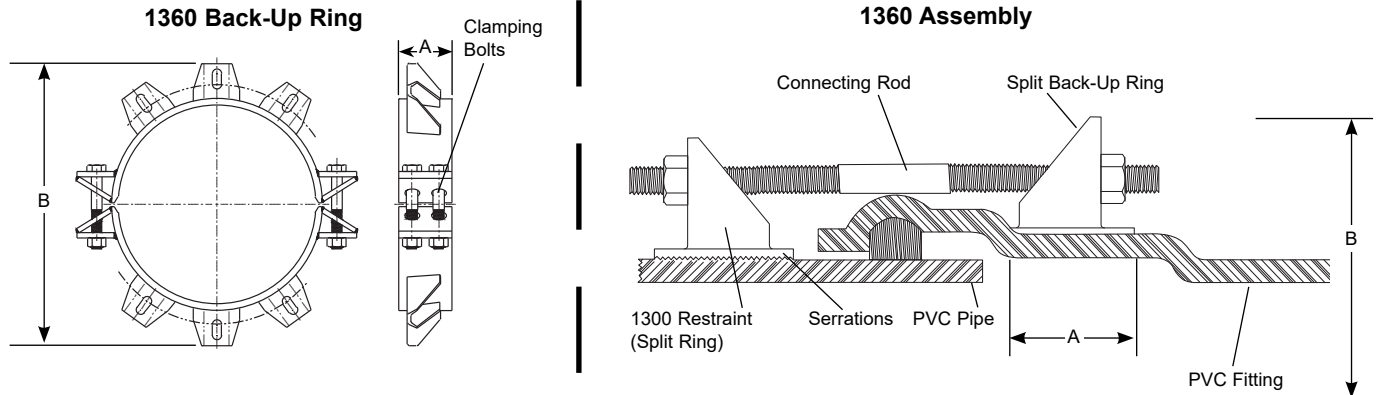

NOM. PIPE SIZE	OD (IN.)	CATALOG NUMBER	BACK-UP RING		CONNECTING RODS	RESTRAINT CLAMPING BOLTS	BACKUP RING CLAMPING BOLTS	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEMS
			A	*B APPROX.					
14"	15.3	UFR1360-C-14-xxxx-Y-U	4"	24-3/4"	(6) 3/4" x 24"	(4) 7/8" x 7"	(4) 7/8" x 7"	129.5	
16"	17.4	UFR1360-C-16-xxxx-Y-U	4"	27-1/4"	(6) 3/4" x 30"	(4) 7/8" x 5"	(4) 7/8" x 7"	134	
18"	19.5	UFR1360-C-18-xxxx-Y-U	5"	29-1/4"	(8) 3/4" x 30"	(4) 1" x 7"	(4) 7/8" x 7"	169	
20"	21.6	UFR1360-C-20-xxxx-Y-U	5"	32-3/4"	(8) 3/4" x 30"	(4) 1" x 7"	(4) 1" x 7"	246	
24"	25.8	UFR1360-C-24-xxxx-Y-U	5"	37-3/4"	(12) 3/4" x 36"	(4) 1" x 7"	(4) 1" x 7"	310	
30"	32	UFR1360-C-30-xxxx-Y-U	7"	42-3/4"	(12) 1" x 40"	(6) 1-1/8" x 9"	(6) 1-1/8" x 9"	527	
36"	38.3	UFR1360-C-36-xxxx-Y-U	7"	49-3/4"	(12) 1" x 40"	(6) 1-1/8" x 9"	(6) 1-1/8" x 9"	600	

*These are approximate dimensions. Dimensions are dependent on the bell run O.D.

Note: Bell run O.D. and pipe manufacturer are required when ordering.

Supply bell run outside diameter with order for units 14" and larger.



FEATURES

- Split ring restraint - Fabricated carbon steel per ASTM A36 or cast ductile iron per ASTM A536
- Split back-up ring - Fabricated carbon steel per ASTM A36 or cast ductile iron per ASTM A536
- Rods, bolts and nuts - Type 304 stainless steel per ASTM A193 and A194
- Rated at full-rated pressure of any class PVC pipe, minimum 2:1 safety factor
- Fits standard C907 fittings
- Coating - Epoxy coating - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



06/25/21

Submitted By: