



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1360-P-x-xxxx-I style)




SERIES 1360-P RESTRAINT DEVICE FOR SEWER PIPE AND PRESSURE FITTINGS PIPE SIZES 4" - 12"

1360-P Back-Up Ring

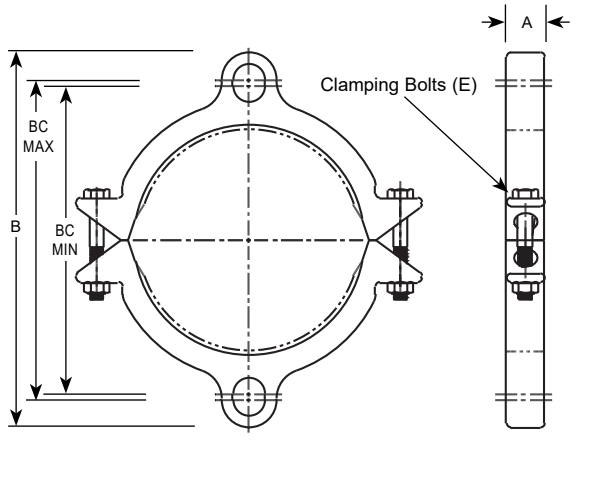

1360-P Assembly

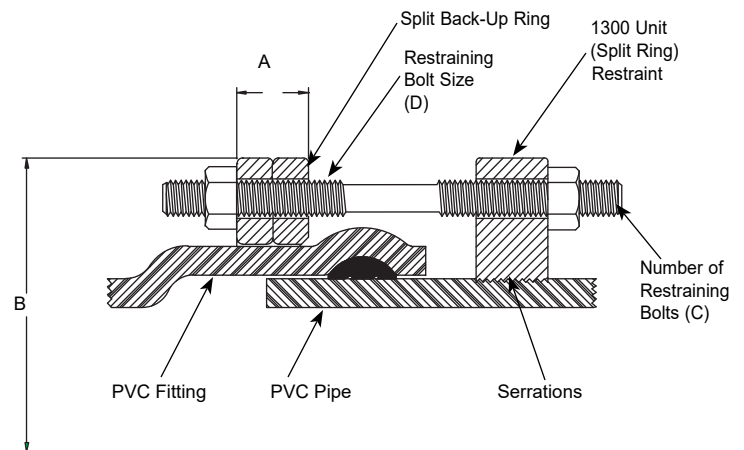

NOM PIPE SIZE	SEWER PIPE STYLE 1360-P		A	*B APPROX	RESTRAINING RODS		RESTRAINT CLAMPING BOLTS	BACK-UP RING CLAMPING BOLTS (E)	BC MIN	BC MAX	APPROX. WT. LBS.	✓ SUBMITTED ITEMS
	OD	CATALOG No.			QTY. C	SIZE D						
4"	4.22	UFR1360-P-4-xxxx-I	1-1/8"	9-1/8"	2	3/4" x 12"	(2) 5/8"x2-1/4"	(2) 5/8"x3-1/2"	7.14"	7.50"	13.5	
6"	6.28	UFR1360-P-6-xxxx-I	1-1/8"	11-1/8"	2	3/4" x 12"	(2) 5/8"x2-1/4"	(2) 5/8"x3-1/2"	9.14"	9.50"	18.0	
8"	8.40	UFR1360-P-8-xxxx-I	1-1/4"	13-7/8"	2	3/4" x 12"	(2) 5/8"x2-1/4"	(2) 3/4"x4"	11.36"	12.98"	29.0	
10"	10.50	UFR1360-P-10-xxxx-I	1-3/4"	16-5/8"	2	3/4" x 17"	(2) 5/8"x2-1/4"	(2) 7/8"x5"	13.9"	15"	35.0	
12"	12.50	UFR1360-P-12-xxxx-I	4"	18"	2	3/4" x 17"	(2) 5/8"x2-1/4"	(4) 7/8"x7"	-	-	55.9	

* These are approximate dimensions. Dimensions are dependent on the bell run O.D.

Note: Bell run O.D. and pipe manufacturer are required when ordering.

FEATURES

- Split ring restraint cast of 65-45-12 grade ductile iron per ASTM A536 - Armorguard e-coat applied epoxy
- Split back-up ring cast of 65-45-12 grade ductile iron per ASTM A536 or fabricated from carbon steel per ASTM A36 - black alkyd shop coat (NSF 61 approved)
- Rods and nuts (included) - High strength, low alloy steel per ANSI/AWWA C111/A21.11
- 360° contact and support of the pipe wall
- Rated at 50 psi with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



07/17/18

Submitted By: