



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR1360-S-xx-xxxx-I style)



### UNI-FLANGE 1360-S RESTRAINT HARNESS FOR PVC PIPE AND PRESSURE FITTINGS PIPE SIZES 10" - 12"

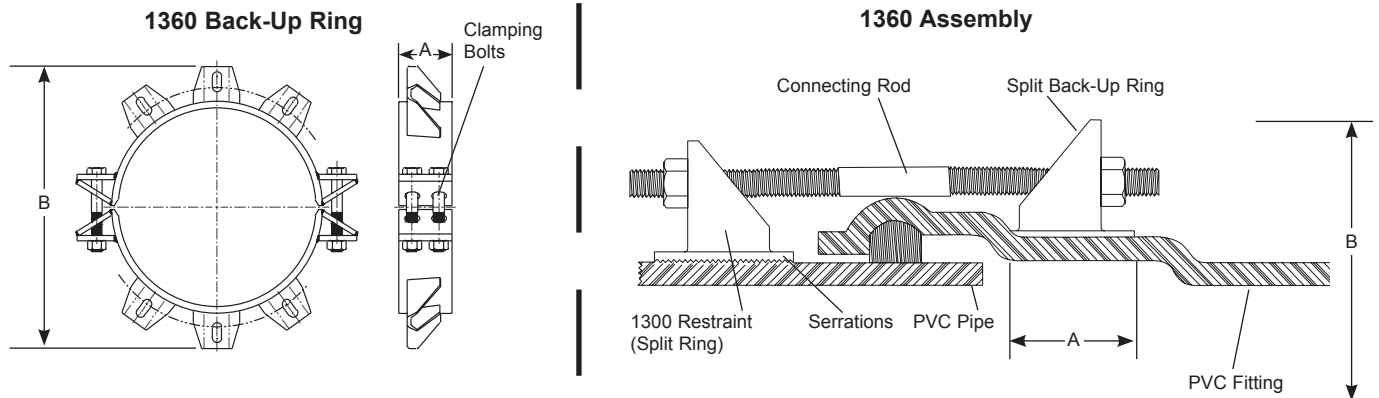

NOM. PIPE SIZE	OD (IN.)	CATALOG NUMBER	BACK-UP RING		RESTRAINT RODS	RESTRAINT CLAMPING BOLTS	BACKUP RING CLAMPING BOLTS	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEMS
			A	*B APPROX.					
10"	10.75	UFR1360-S-10-xxxx-I	4"	19-3/4"	(4) 3/4" x 17"	(2) 7/8" x 5"	(4) 7/8" x 7"	70	
12"	12.75	UFR1360-S-12-xxxx-I	4"	22-3/4"	(4) 3/4" x 17"	(2) 7/8" x 5"	(4) 7/8" x 7"	78	

\*These are approximate dimensions. Dimensions are dependent on the bell run O.D.

**Note:** Bell run O.D. and pipe manufacturer are required when ordering.

Supply bell run outside diameter with order  
for units 10" and larger.



## FEATURES

- Split ring restraint cast of 65-45-12 grade ductile iron per ASTM A536 - Armorguard e-coat applied epoxy (NSF 61 approved), grey top coat for identification purposes
- Split Back-Up Ring - Fabricated from carbon steel per ASTM A36 - black alkyd enamel shop coat (NSF 61 approved), grey top coat for identification purposes
- Rods (included) - High strength, low alloy steel per ANSI/AWWA C111/A21.11
- Side clamping nuts and bolts - Grade 5 zinc plated
- Rated at full-rated pressure of any class PVC pipe, minimum 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com



09/21/20

Submitted By: