



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR1360-S-xx-xxxx-Y-U style)



**SERIES 1360-S 14"-24" RESTRAINT HARNESS (WITH TYPE 304 STAINLESS STEEL AND EPOXY COATING)  
FOR PVC PIPE AND PRESSURE FITTINGS**

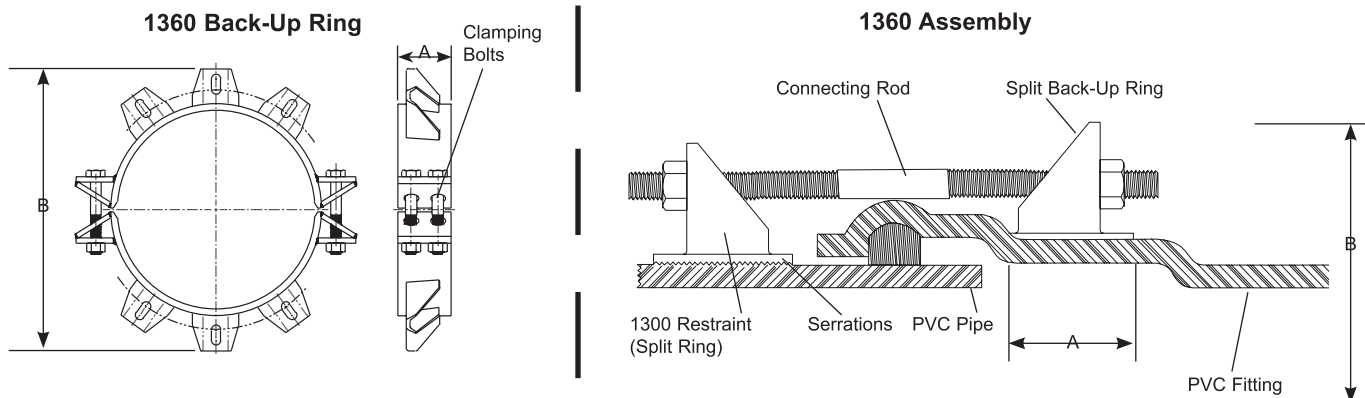


NOM. PIPE SIZE	OD (In.)	CATALOG NUMBER	BACK-UP RING		RESTRAINT RODS	RESTRAINT CLAMPING BOLTS	BACKUP RING CLAMPING BOLTS	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEMS
			A	*B APPROX.					
14"	14.00	UFR1360-S-14-xxxx-Y-U	4"	24-1/4"	(6) 3/4" x 30"	(4) 7/8" x 7"	(4) 7/8" x 7"	122	
16"	16.00	UFR1360-S-16-xxxx-Y-U	4"	25-1/4"	(6) 3/4" x 30"	(4) 7/8" x 7"	(4) 7/8" x 7"	130	
18"	18.00	UFR1360-S-18-xxxx-Y-U	5"	27-3/4"	(8) 3/4" x 30"	(4) 1" x 7"	(4) 7/8" x 7"	163	
20"	20.00	UFR1360-S-20-xxxx-Y-U	5"	30"	(8) 3/4" x 30"	(4) 1" x 7"	(4) 1" x 7"	235.5	
24"	24.00	UFR1360-S-24-xxxx-Y-U	5"	34-3/4"	(12) 3/4" x 36"	(4) 1" x 7"	(4) 1" x 7"	293	

\*These are approximate dimensions. Dimensions are dependent on the bell run O.D.

**Note:** Bell run O.D. and pipe manufacturer are required when ordering.

Supply bell run outside diameter with order  
for units 10" and larger.

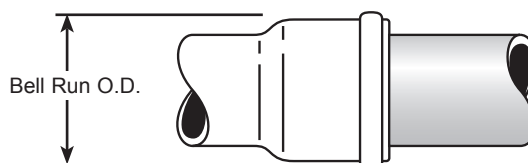

### FEATURES

- Split ring restraint and split back-up ring fabricated from carbon steel per ASTM A36
- Rods, clamping bolts, and nuts (included) - Type 304 stainless steel per ASTM A193 and ASTM A194
- Rated at full-rated pressure of any class PVC pipe, minimum 2:1 safety factor
- Coating: Black epoxy with gray topcoat for identification purposes

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



#### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com



09/14/20

Submitted By: