



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1369-C-x-I style)




UNI-FLANGE SERIES 1369-C RESTRAINT DEVICE FOR C900 AND C909 PVC PIPE AND PRESSURE FITTINGS
SIZES 4" - 12"

1309-C SPLIT RESTRAINT

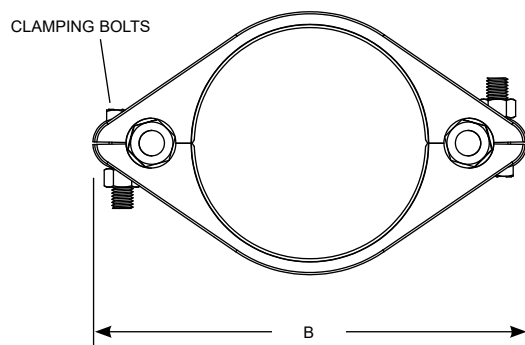

Drawing represents 6"

1369-C ASSEMBLY

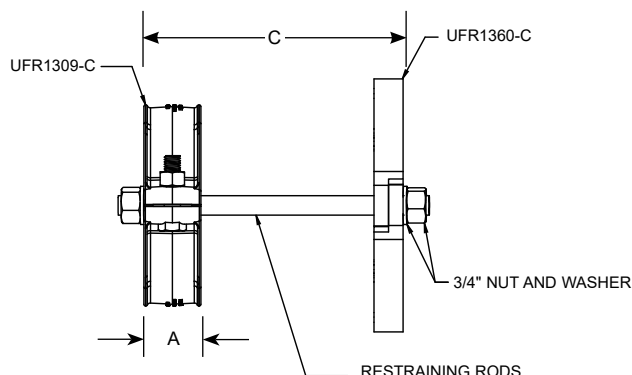

PATENT
10,837,584

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1369-C		A	B APPROX.	C MAX	RESTRAINING BOLTS / RODS		CLAMPING BOLTS		MAX BELL CLEARANCE	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD (IN.)	CATALOG No.				No.	SIZE	No.	SIZE			
4"	4.80	UFR1369-C-4-I	2-13/64"	10-13/16"	10"	2	3/4" x 12"	2	5/8" x 2-1/2"	6.63"	14.67	
6"	6.90	UFR1369-C-6-I	2-13/64"	12-13/16"	10"	2	3/4" x 12"	2	5/8" x 2-1/2"	8.63"	18.59	
8"	9.05	UFR1369-C-8-I	2-13/64"	16-47/64"	10"	2	3/4" x 12"	2	5/8" x 3"	14.00"	31.04	
10"	11.10	UFR1369-C-10-I	2-1/4"	19-1/16"	22"	4	3/4" x 24"	2	5/8" x 3"	14.13"	42.88	
12"	13.20	UFR1369-C-12-I	2-13/64"	21-3/8"	22"	4	3/4" x 24"	2	5/8" x 3"	16.63"	51.24	

FEATURES

- Restraint - Cast ductile iron per ASTM A536 grade 65-45-12
- Back-up ring - Cast ductile iron per ASTM A536, grade 65-45-12 or fabricated carbon steel per ASTM A36
- Restraining Rods (included) - High strength, low alloy steel ANSI / AWWA C111 / A21.11
- Side clamping bolts and nuts - Grade 5, zinc-plated
- Clamping pads and tie rod lugs co-located so installer doesn't have to work under the pipe.
- Rated at full-rated pressure of any class of C900 and C909 PVC pipe, minimum 2:1 safety factor
- Rated at full-rated pressure of any class of C906 HDPE pipe (provided an insert is used)
- Black e-coat epoxy coating
- Restraint has 360° contact and support of the pipe wall

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

11/16/20

Submitted By: