



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1369-C-x-RB-U style)




**SERIES 1369-C 4" - 8" RESTRAINT DEVICE (WITH BLUE FLUOROCARBON COATED HARDWARE)
FOR C900, C909 PVC AND HDPE PIPE AND PRESSURE FITTINGS**

1309-C SPLIT RESTRAINT

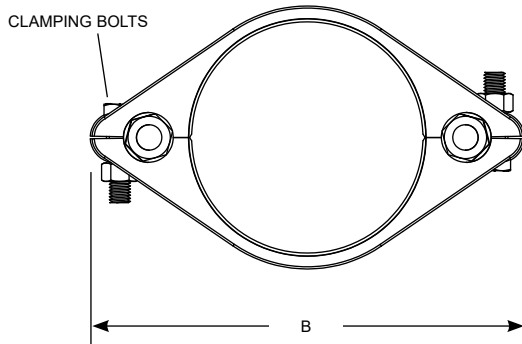

Drawing represents 6"

1369-C ASSEMBLY

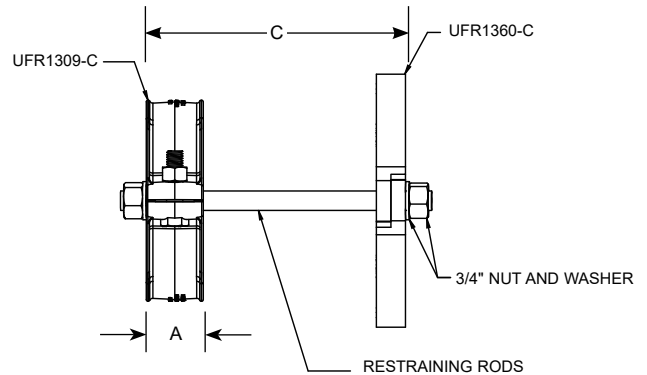

**PATENT
10,837,584**

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1369-C		A	B APPROX.	C MAX	RESTRAINING BOLTS / RODS		CLAMPING BOLTS		MAX BELL CLEARANCE	APPROX. Wt. LBS.	✓ SUBMITTED ITEM(S)
	OD (In.)	CATALOG No.				No.	SIZE	No.	SIZE			
4"	4.80	UFR1369-C-4-RB-U	2-13/64"	10-13/16"	10"	2	3/4" x 12"	2	5/8" x 2-1/2"	6.63"	16.38	
6"	6.90	UFR1369-C-6-RB-U	2-13/64"	12-13/16"	10"	2	3/4" x 12"	2	5/8" x 2-1/2"	8.63"	21.91	
8"	9.05	UFR1369-C-8-RB-U	2-13/64"	16-47/64"	10"	2	3/4" x 12"	2	5/8" x 3"	14.00"	32.37	

FEATURES

- Cast ductile iron per ASTM A536 grade 65-45-12
- Restraining Rods (included) - High strength, low alloy steel ANSI / AWWA C111 / A21.11, blue fluorocarbon coated
- Side clamping bolts and nuts - Grade 5, blue fluorocarbon coated
- Clamping pads and tie rod lugs co-located so installer doesn't have to work under the pipe.
- Rated at full-rated pressure of any class of C900 and C909 PVC pipe, minimum 2:1 safety factor
- Rated at full-rated pressure of any class of C906 HDPE pipe (provided an insert is used)
- Black e-coat epoxy coating
- Restraint has 360° contact and support of the pipe wall

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

11/16/20

Submitted By: