



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1369-C-xx-RB-U style)




UNI-FLANGE SERIES 1369-C RESTRAINT DEVICE (WITH BLUE FLUOROCARBON COATED HARDWARE)
FOR C900 AND C909 PVC PIPE AND PRESSURE FITTINGS SIZES 10" - 12"

1309-C SPLIT RESTRAINT

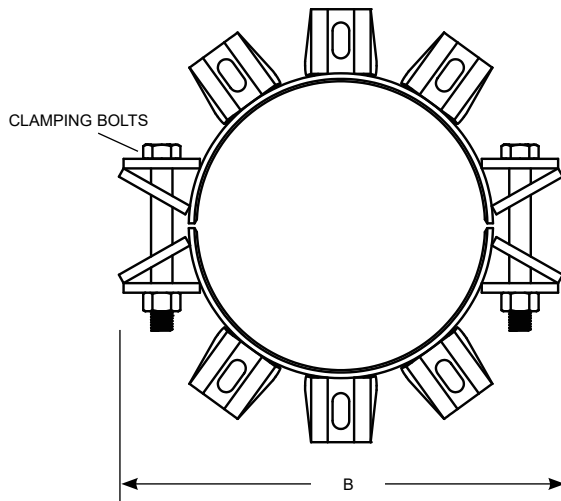

1369-C ASSEMBLY

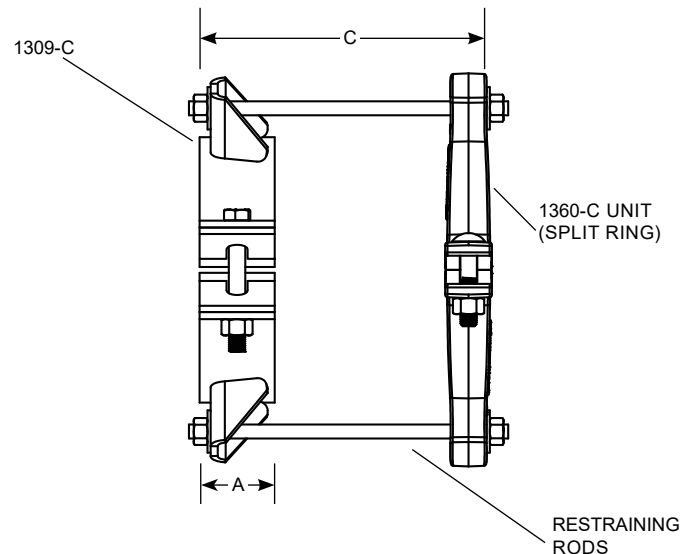

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1369-C		A	B APPROX.	C MAX	RESTRAINING BOLTS / RODS		CLAMPING BOLTS		MAX BELL CLEARANCE	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD (In.)	CATALOG No.				No.	SIZE	No.	SIZE			
10"	11.10	UFR1369-C-10-RB-U	4"	18-39/64"	15"	4	3/4" x 17"	2	7/8" x 7"	15.63"	58.67	
12"	13.20	UFR1369-C-12-RB-U	4"	20-1/2"	15"	4	3/4" x 17"	2	7/8" x 7"	17.75"	64.52	

FEATURES

- Restraint - Fabricated steel per ASTM A36, black alkyd enamel shop coat
- Back-up ring - Ductile iron per ASTM A536, e-coat epoxy coating
- Restraining rods, nuts and bolts are high strength, low alloy steel per ANSI / AWWA C111 / A21.11, blue fluorocarbon coating
- Rated at full-rated pressure of any class of C900, C909 PVC pipe, minimum 2:1 safety factor
- 360° contact and support of the pipe wall

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

03/11/21

Submitted By: