



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-C-xx-E3-U style)




SERIES 1390-C RESTRAINT HARNESS FOR PVC PIPE OR HDPE BELL JOINTS

1300 SPLIT RESTRAINT

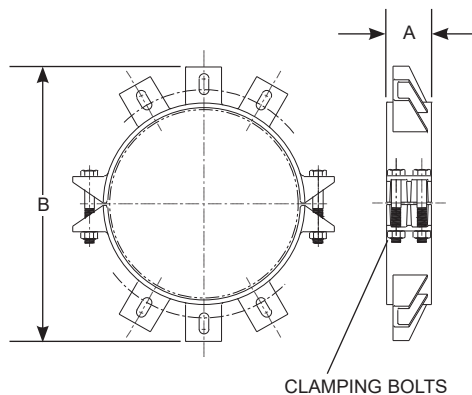

1390 ASSEMBLY

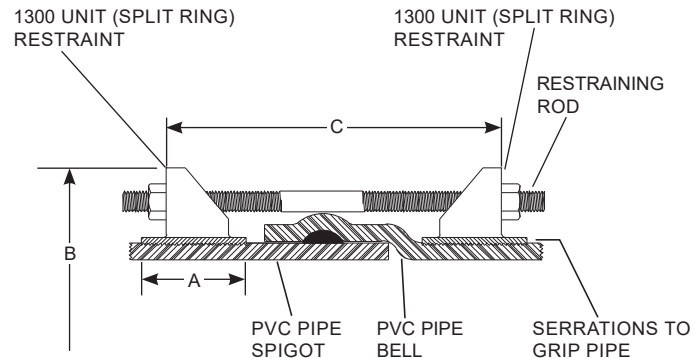

NOM. PIPE SIZE	OD (IN.)	CATALOG NUMBER	A	B APPROX.	C MAX	RESTRAINT BOLTS / RODS	CLAMPING BOLTS PER GLAND	MAX BELL CLEARANCE	APPROX. WEIGHT LBS	SUBMITTED ITEM(S)
						NUMBER AND SIZE	NUMBER AND SIZE			
14"	15.30	UFR1390-C-14-E3-U	4"	22-3/4"	28"	(6) 3/4" x 30"	(4) 7/8" x 7"	19.56"	136	
16"	17.40	UFR1390-C-16-E3-U	4"	24-5/8"	28"	(6) 3/4" x 30"	(4) 7/8" x 5"	21.63"	135	
18"	19.50	UFR1390-C-18-E3-U	5"	26-3/4"	28"	(8) 3/4" x 30"	(4) 1" x 7"	23.75"	206	
20"	21.60	UFR1390-C-20-E3-U	5"	29"	34"	(8) 3/4" x 36"	(4) 1" x 7"	25.88"	263	
24"	25.80	UFR1390-C-24-E3-U	5"	33-5/32"	34"	(12) 3/4" x 36"	(4) 1" x 7"	30.00"	406	
30"	32.00	UFR1390-C-30-E3-U	10"	40-5/8"	46"	(12) 1" x 48"	(6) 1-1/8" x 9"	37.00"	601	
36"	38.30	UFR1390-C-36-E3-U	10"	48"	46"	(12) 1" x 48"	(8) 1-1/8" x 9"	44.38"	672	

Note: For DR18, please contact factory for more information.

FEATURES

- Fabricated carbon steel per ASTM A36 or cast ductile iron per ASTM A536
- Rods (included) - high strength, low alloy steel per ANSI / AWWA C111 / A21.11
- Side clamping nuts and bolts - Grade 5, zinc plated
- Rated at full-rated pressure of any class of PVC pipe or HDPE, minimum 2:1 safety factor
- Installation on HDPE (SDR9 through SDR 26) requires use of a properly sized insert stiffener
- Coating - Epoxy coating - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



09/14/23

Submitted By: