



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-C-xx-EB-U100 style)




SERIES 1390-C RESTRAINT HARNESS (WITH EPOXY COATING AND BLUE FLUOROCARBON-COATED HARDWARE) FOR PVC PIPE BELL JOINTS

1300 SPLIT RESTRAINT

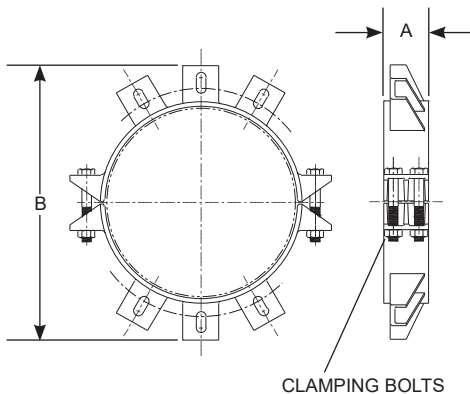

1390 ASSEMBLY

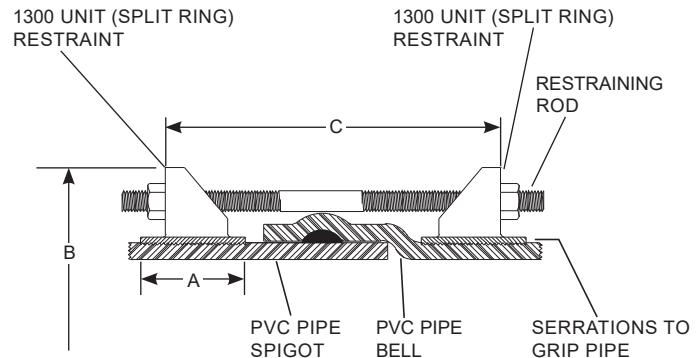

| NOM. PIPE SIZE | OD (IN.) | CATALOG NUMBER | A | B APPROX. | C MAX | RESTRAINT BOLTS / RODS | CLAMPING BOLTS PER GLAND | MAX BELL CLEARANCE | APPROX. WEIGHT LBS | ✓ SUBMITTED ITEM(S) |
|----------------------|-------------|----------------------|-----|--------------|----------|---------------------------|-----------------------------|-----------------------|--------------------------|------------------------|
| | | | | | | NUMBER AND SIZE | NUMBER AND SIZE | | | |
| 14" | 15.30 | UFR1390-C-14-EB-U100 | 4" | 22-3/4" | 28" | (6) 3/4" x 30" | (4) 7/8" x 7" | 19.56" | 136 | |
| 16" | 17.40 | UFR1390-C-16-EB-U100 | 4" | 24-5/8" | 28" | (6) 3/4" x 30" | (4) 7/8" x 5" | 21.63" | 135 | |
| 18" | 19.50 | UFR1390-C-18-EB-U100 | 5" | 26-3/4" | 28" | (8) 3/4" x 30" | (4) 1" x 7" | 23.75" | 206 | |
| 20" | 21.60 | UFR1390-C-20-EB-U100 | 5" | 29" | 34" | (8) 3/4" x 36" | (4) 1" x 7" | 25.88" | 263 | |
| 24" | 25.80 | UFR1390-C-24-EB-U100 | 5" | 33-5/32" | 34" | (12) 3/4" x 36" | (4) 1" x 7" | 30.00" | 406 | |
| 30" | 32.00 | UFR1390-C-30-EB-U100 | 10" | 40-5/8" | 46" | (12) 1" x 48" | (6) 1-1/8" x 9" | 37.00" | 601 | |
| 36" | 38.30 | UFR1390-C-36-EB-U100 | 10" | 48" | 46" | (12) 1" x 48" | (8) 1-1/8" x 9" | 44.38" | 672 | |

Note: For DR18, please contact factory for more information.

FEATURES

- Fabricated carbon steel per ASTM A36 or cast ductile iron per ASTM A536
- Rods (included) - high strength, low alloy steel per ANSI / AWWA C111/A21.11 with blue fluorocarbon coating
- Side clamping nuts and bolts - Grade 5 with blue fluorocarbon coating
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Installation on HDPE (SDR9 through SDR26) requires use of a properly sized insert stiffener
- Coating - Epoxy coating - NSF 61 approved
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



09/14/23

Submitted By: