


SUBMITTAL INFORMATION






SERIES 1390-C RESTRAINT HARNESS (WITH BLUE FLUOROCARBON-COATED HARDWARE) FOR PVC PIPE BELL JOINTS

1300 SPLIT RESTRAINT



1390 ASSEMBLY

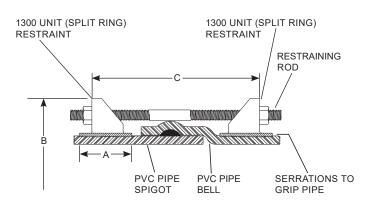

| Nom. Pipe Size | OD (In.) | CATALOG NUMBER | A | B Approx. | C Max | RESTRAINING BOLTS / RODS | | CLAMPING BOLTS PER GLAND | | MAX BELL | APPROX. WEIGHT | ✓ SUBMITTED |
|----------------------|-------------|-------------------|---------|--------------|----------|-----------------------------|--------------|-----------------------------|-------------|-----------|-------------------|-------------|
| | | | | | | No. | Size | No. | Size | CLEARANCE | LBS. | ITEM(S) |
| 14" | 15.30 | UFR1390-C-14-RB-I | 4" | 22-7/16" | 28" | 6 | 3/4" x 30" | 4 | 7/8" x 7" | 19-5/8" | 125 | |
| 16" | 17.40 | UFR1390-C-16-RB-I | 4" | 24-5/8" | 28" | 6 | 3/4" x 30" | 4 | 7/8" x 7" | 21-5/8" | 130 | |
| 18" | 19.50 | UFR1390-C-18-RB-I | 5" | 26-7/16" | 28" | 8 | 3/4" x 30" | 4 | 1" x 7" | 23-7/8" | 180 | |
| 20" | 21.60 | UFR1390-C-20-RB-I | 5" | 29-5/32" | 34" | 8 | 3/4" x 36" | 4 | 1-1/8" x 9" | 26-1/8" | 235 | |
| 24" | 25.80 | UFR1390-C-24-RB-I | 5" | 33-5/8" | 34" | 12 | 3/4" x 36" | 4 | 1-1/8" x 9" | 30-5/8" | 305 | |
| 30" | 32.00 | UFR1390-C-30-RB-I | 7" | 40-7/8" | 46" | 12 | 1" x 48" | 6 | 1-1/8" x 6" | 37-1/16" | 450 | |
| 36" | 38.30 | UFR1390-C-36-RB-I | 7" | 48-1/4" | 46" | 12 | 1" x 48" | 6 | 1-1/8" x 6" | 44-3/8" | 520 | |
| 42" | 44.50 | UFR1390-C-42-RB-I | 10-3/4" | 57-7/16" | 50" | 16 | 1-1/4" x 52" | 8 | 1-1/8" x 6" | 52-3/4" | 1240 | |

Note: For DR18, please contact factory for more information.

FEATURES

- Ductile iron per ASTM A536, grade 65-45-12
- Rods (included) high strength, low alloy steel per ANSI / AWWA C111/A21.11 with blue fluorocarbon coating
- Side clamping bolts and nuts Grade 5 with blue fluorocarbon coating
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Coating Epoxy coating NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 www.fordmeterbox.com



09/14/23

Submitted By: