



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-C-xx-RB-U style)




SERIES 1390-C RESTRAINT HARNESS FOR PVC PIPE BELL JOINTS WITH BLUE FLUOROCARBON-COATED HARDWARE

1300 SPLIT RESTRAINT

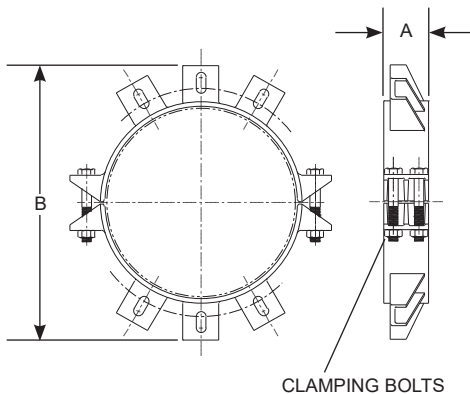

1390 ASSEMBLY

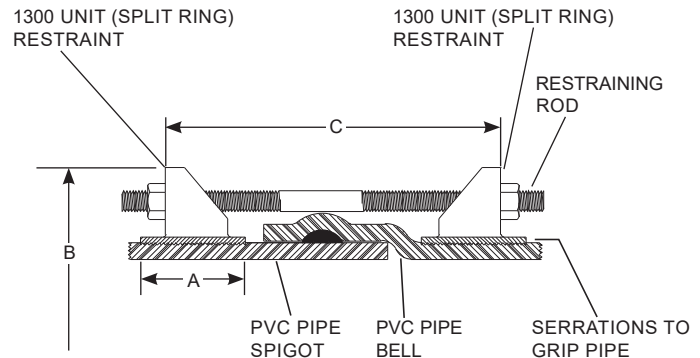

NOM. PIPE SIZE (IN.)	OD (IN.)	CATALOG NUMBER	A (IN.)	B APPROX. (IN.)	C MAX (IN.)	RESTRAINT BOLTS / RODS	CLAMPING BOLTS PER GLAND	MAX BELL CLEARANCE (IN.)	APPROX. WEIGHT LBS	✓ SUBMITTED ITEM(S)
						NUMBER AND SIZE (IN.)	NUMBER AND SIZE (IN.)			
14	15.30	UFR1390-C-14-RB-U	4	22-3/4	28	(6) 3/4 x 30	(4) 7/8 x 7	19.56	136	
16	17.40	UFR1390-C-16-RB-U	4	24-5/8	28	(6) 3/4 x 30	(4) 7/8 x 5	21.63	135	
18	19.50	UFR1390-C-18-RB-U	5	26-3/4	28	(8) 3/4 x 30	(4) 1 x 7	23.75	206	
20	21.60	UFR1390-C-20-RB-U	5	29	34	(8) 3/4 x 36	(4) 1 x 7	25.88	263	
24	25.80	UFR1390-C-24-RB-U	5	33-5/32	34	(12) 3/4 x 36	(4) 1 x 7	30.00	406	
30	32.00	UFR1390-C-30-RB-U	10	40-5/8	46	(12) 1 x 48	(6) 1-1/8 x 9	37.00	601	
36	38.30	UFR1390-C-36-RB-U	10	48	46	(12) 1 x 48	(8) 1-1/8 x 9	44.38	672	
42	44.50	UFR1390-C-42-RB-U	10	57-7/16	50	(18) 1-1/4 x 52	(8) 1-1/8 x 9	51.88	850	

Note: For DR18, please contact factory for more information.

FEATURES

- Fabricated carbon steel per ASTM A36 or cast ductile iron per ASTM A536
- Rods (included) - high strength, low alloy steel per ANSI / AWWA C111/A21.11 with blue fluorocarbon coating
- Side clamping nuts and bolts - Grade 5 with blue fluorocarbon coating
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Installation on HDPE (SDR9 through SDR26) requires use of a properly sized insert stiffener
- Sizes 4"-16" suitable for use on ductile iron pipe. See catalog for installation and pressure capabilities
- Finish - Shop coat - NSF 61 certified

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com



08/29/25

Submitted By: