



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-C-xx-X-U style)




SERIES 1390-C RESTRAINT HARNESS (WITH 304 STAINLESS STEEL HARDWARE) FOR PVC PIPE OR HDPE BELL JOINTS

1300 SPLIT RESTRAINT

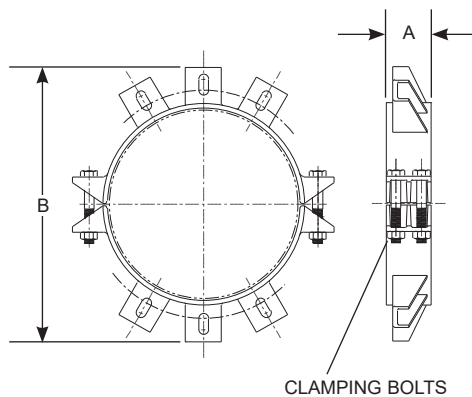

1390 ASSEMBLY

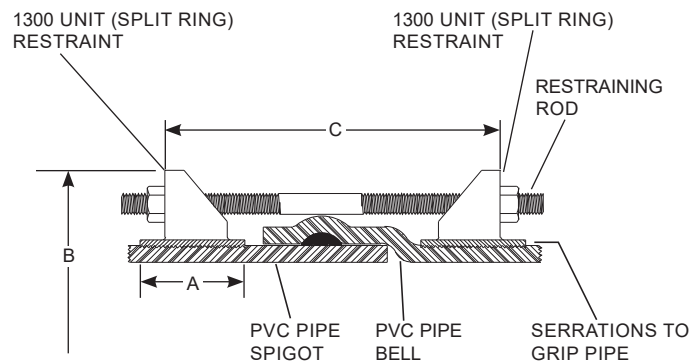

| NOM. PIPE SIZE | OD (IN.) | CATALOG NUMBER | A | B APPROX. | C MAX | RESTRAINT BOLTS / RODS | CLAMPING BOLTS PER GLAND | MAX BELL CLEARANCE | APPROX. WEIGHT LBS | ✓ SUBMITTED ITEM(S) |
|----------------------|-------------|------------------|-----|--------------|----------|---------------------------|-----------------------------|-----------------------|--------------------------|------------------------|
| | | | | | | NUMBER AND SIZE | NUMBER AND SIZE | | | |
| 14" | 15.30 | UFR1390-C-14-X-U | 4" | 22-3/4" | 28" | (6) 3/4" x 30" | (4) 7/8" x 7" | 19.56" | 136 | |
| 16" | 17.40 | UFR1390-C-16-X-U | 4" | 24-5/8" | 28" | (6) 3/4" x 30" | (4) 7/8" x 5" | 21.63" | 135 | |
| 18" | 19.50 | UFR1390-C-18-X-U | 5" | 26-3/4" | 28" | (8) 3/4" x 30" | (4) 1" x 7" | 23.75" | 206 | |
| 20" | 21.60 | UFR1390-C-20-X-U | 5" | 29" | 34" | (8) 3/4" x 36" | (4) 1" x 7" | 25.88" | 263 | |
| 24" | 25.80 | UFR1390-C-24-X-U | 5" | 33-5/32" | 34" | (12) 3/4" x 36" | (4) 1" x 7" | 30.00" | 406 | |
| 30" | 32.00 | UFR1390-C-30-X-U | 10" | 40-5/8" | 46" | (12) 1" x 48" | (6) 1-1/8" x 9" | 37.00" | 601 | |
| 36" | 38.30 | UFR1390-C-36-X-U | 10" | 48" | 46" | (12) 1" x 48" | (8) 1-1/8" x 9" | 44.38" | 672 | |

Note: For DR18, please contact factory for more information.

FEATURES

- Fabricated carbon steel per ASTM A36 or cast ductile iron per ASTM A536
- Restraining rods, clamping bolts and hardware - Type 304 stainless steel per ASTM A193 and ASTM A194
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Installation on HDPE (SDR9 through SDR26) requires use of a properly sized insert stiffener
- Coating - Shop coat - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com



09/14/23

Submitted By: