



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-C-xx-XCBN-I style)




SERIES 1390-C RESTRAINT HARNESS FOR PVC PIPE BELL JOINTS

1300 SPLIT RESTRAINT

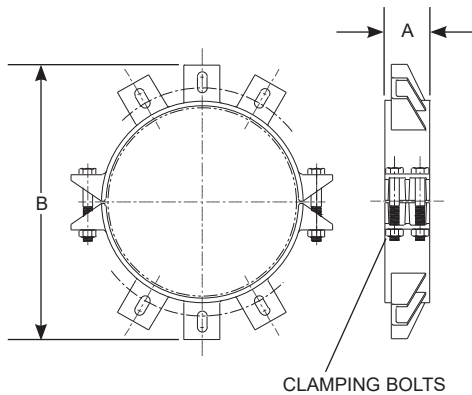

1390 ASSEMBLY

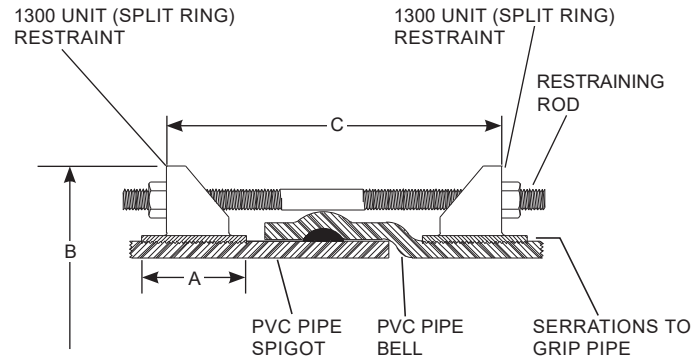

NOM. PIPE SIZE	OD (IN.)	CATALOG NUMBER	A	B APPROX.	C MAX	RESTRAINING BOLTS / RODS		CLAMPING BOLTS PER GLAND		MAX BELL CLEARANCE	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEM(S)
						No.	SIZE	No.	SIZE			
14"	15.30	UFR1390-C-14-XCBN-I	4"	22-7/16"	28"	6	3/4" x 30"	4	7/8" x 7"	19-5/8"	125	
16"	17.40	UFR1390-C-16-XCBN-I	4"	24-5/8"	28"	6	3/4" x 30"	4	7/8" x 7"	21-5/8"	130	
18"	19.50	UFR1390-C-18-XCBN-I	5"	26-7/16"	28"	8	3/4" x 30"	4	1" x 7"	23-7/8"	180	
20"	21.60	UFR1390-C-20-XCBN-I	5"	29-5/32"	34"	8	3/4" x 36"	4	1-1/8" x 9"	26-1/8"	235	
24"	25.80	UFR1390-C-24-XCBN-I	5"	33-5/8"	34"	12	3/4" x 36"	4	1-1/8" x 9"	30-5/8"	305	
30"	32.00	UFR1390-C-30-XCBN-I	7"	40-7/8"	46"	12	1" x 48"	6	1-1/8" x 6"	37-1/16"	450	
36"	38.30	UFR1390-C-36-XCBN-I	7"	48-1/4"	46"	12	1" x 48"	6	1-1/8" x 6"	44-3/8"	520	
42"	44.50	UFR1390-C-42-XCBN-I	10-3/4"	57-7/16"	50"	16	1-1/4" x 52"	8	1-1/8" x 6"	52-3/4"	1240	

Note: For DR18, please contact factory for more information.

FEATURES

- Ductile iron per ASTM A536, grade 65-45-12
- Rods (included) - High strength, low alloy steel per ANSI / AWWA C111/A21.11
- Side clamping bolts and nuts only - Type 304 stainless steel per ASTM A193 and A194
- Rated at full rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Coating - Epoxy coating - NSF 61 approved

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



09/14/23

Submitted By: