



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-P-15-I style)




SERIES 1390-P 15" RESTRAINT HARNESS FOR SEWER PVC PIPE BELL AND SPIGOT JOINTS

1300 SPLIT RESTRAINT

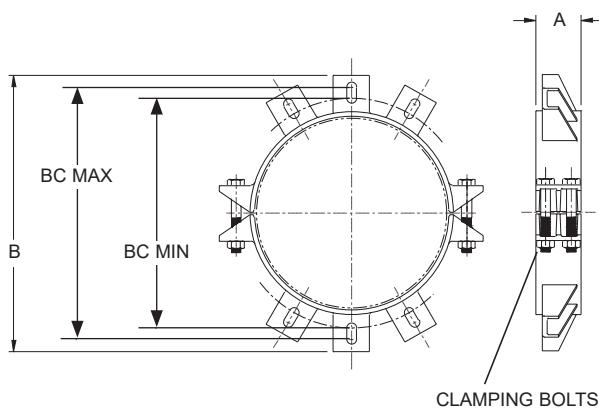

1390 ASSEMBLY

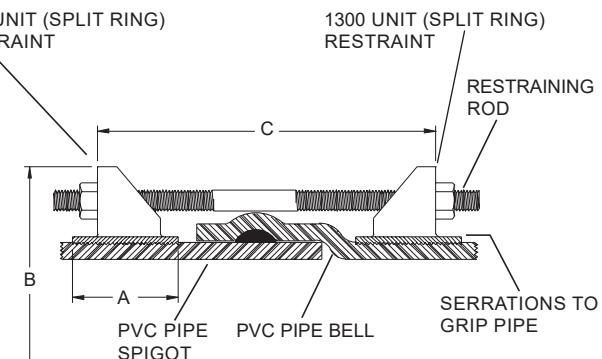

NOM PIPE SIZE (IN.)	STYLE 1390-P		A (IN.)	B APPROX (IN.)	C MAX (IN.)	RESTRAINING RODS		CLAMPING BOLTS PER GLAND		BC MIN (IN.)	BC MAX (IN.)	APPROX. Wt. LBS.	✓ SUBMITTED ITEM(S)
	OD (IN.)	CATALOG NO.				QTY.	SIZE (IN.)	QTY.	SIZE (IN.)				
15	15.30	UFR1390-P-15-I	4	22-5/16	28	4	3/4 x 30	4	7/8 x 7	18.50	20.50	123	

*Contact factory for larger sizes. Exact pipe & bell OD are required.

Note: Although 6 ears are shown, only 4 restraining rods will be supplied/necessary.

FEATURES

- Cast ductile iron per ASTM A536 GR 65-45-12 with black epoxy coating
- Side clamping bolts and nuts: SAE J429, grade 5
- Rods (included) - high strength, low alloy steel per ANSI / AWWA C111/A21.11
- 50 psi rated working pressure with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
www.fordmeterbox.com



Submitted By:

08/25/25