



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-P-15-Q-I style)




SERIES 1390-P 15" RESTRAINT HARNESS FOR SEWER PVC PIPE BELL AND SPIGOT JOINTS

1300 SPLIT RESTRAINT

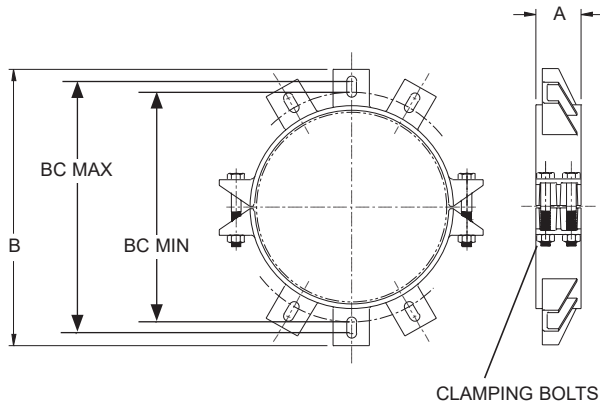

1390 ASSEMBLY

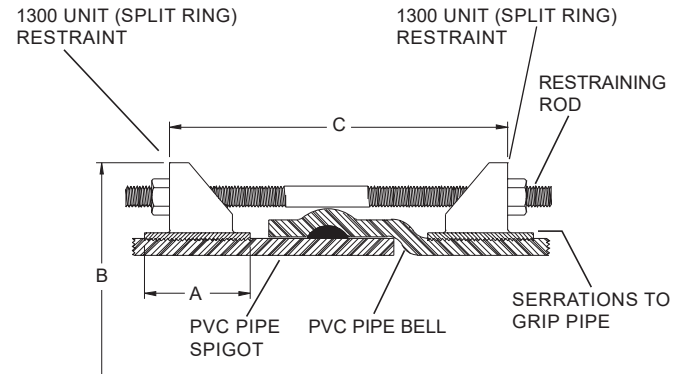

NOM PIPE SIZE (IN.)	STYLE 1390-P		A (IN.)	B APPROX (IN.)	C MAX (IN.)	RESTRAINING RODS		CLAMPING BOLTS PER GLAND		BC MIN (IN.)	BC MAX (IN.)	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD (IN.)	CATALOG No.				QTY.	SIZE (IN.)	QTY.	SIZE (IN.)				
15	15.30	UFR1390-P-15-Q-I	4	22-5/16	28	4	3/4 x 30	4	7/8 x 7	18.50	20.50	123	

*Contact factory for larger sizes. Exact pipe & bell OD are required.

Note: Although 6 ears are shown, only 4 restraining rods will be supplied/necessary.

FEATURES

- Cast ductile iron per ASTM A536 GR 65-45-12 with black epoxy coating
- Restraining rods, clamping bolts and hardware - Type 316 stainless steel per ASTM A193 and A194
- 50 psi rated working pressure with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com



08/25/25

Submitted By: