



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-P-x-RB-I style)

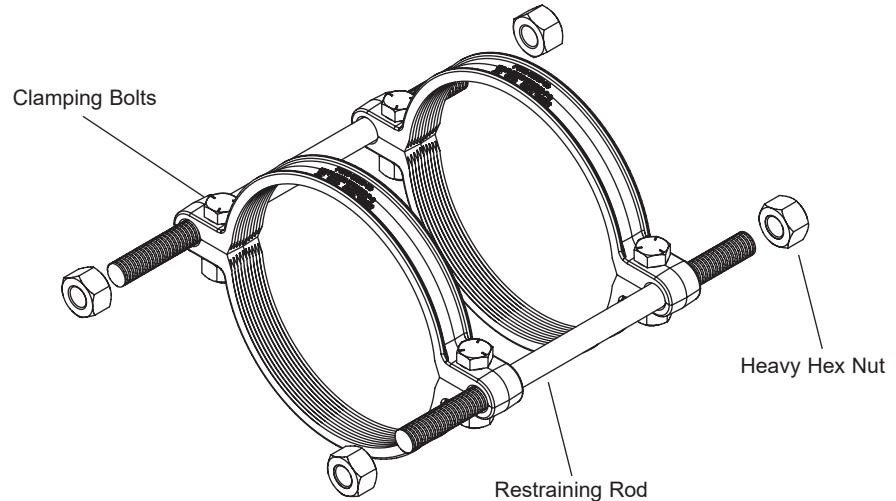

SERIES 1390-P RESTRAINT HARNESS FOR SEWER PIPE BELL JOINTS WITH BLUE FLUOROCARBON COATED HARDWARE

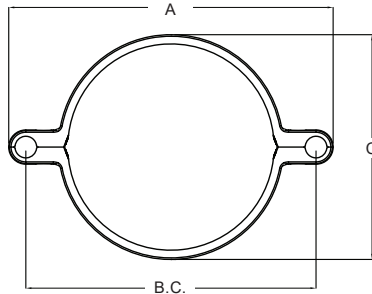

NOM PIPE SIZE	SEWER PIPE OD STYLE 1390-P		A	B.C.	C	RESTRAINTS BOLTS / RODS		CLAMPING BOLTS PER GLAND		APPROX. WT. LBS.	✓ SUBMITTED ITEMS
	OD (IN.)	CATALOG No.				No.	SIZE	No.	SIZE		
4"	4.22	UFR1390-P-4-RB-I	8-57/64"	7-1/2"	4-59/64"	2	3/4" x 17"	2	5/8" x 2-1/4"	9.4	
6"	6.28	UFR1390-P-6-RB-I	10-57/64"	9-1/2"	6-63/64"	2	3/4" x 17"	2	5/8" x 2-1/4"	10.3	
8"	8.40	UFR1390-P-8-RB-I	13-9/64"	11-3/4"	9-3/32"	2	3/4" x 17"	2	5/8" x 2-1/4"	11.3	
10"	10.50	UFR1390-P-10-RB-I	15-23/64"	14"	11-29/64"	2	3/4" x 17"	2	5/8" x 2-1/4"	15.1	
12"	12.50	UFR1390-P-12-RB-I	18"	16-1/4"	13-29/64"	2	3/4" x 17"	2	5/8" x 2-1/4"	17.5	

FEATURES

- Cast ductile iron per ASTM A536 grade 65-45-12
- Clamping bolts and nuts - Grade 5 with blue fluorocarbon coating
- 360° contact and support of the pipe wall
- Restraining rods and nuts are high strength, low alloy steel per ASTM A242 and AWWA C111 with blue fluorocarbon coating
- Rated at 50 psi with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



09/11/23

Submitted By: