



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-P-xx-U style)




SERIES 1390-P RESTRAINT HARNESS FOR SEWER PVC PIPE BELL AND SPIGOT JOINTS

1300 SPLIT RESTRAINT

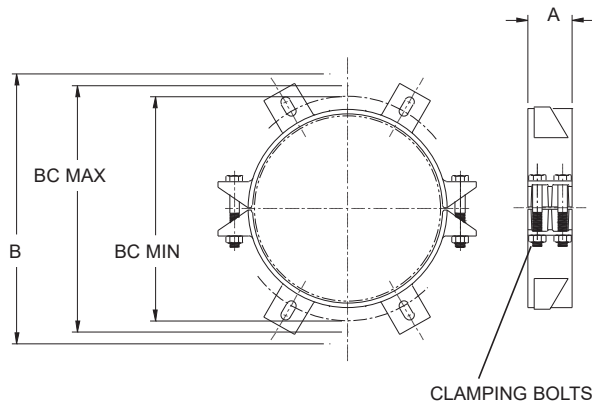

1390 ASSEMBLY

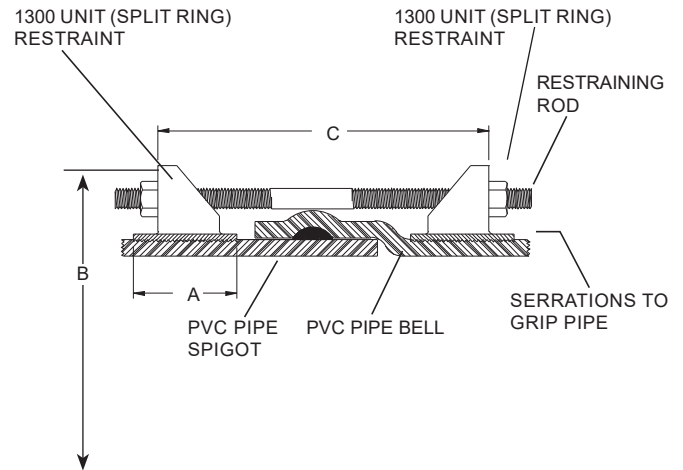

NOM PIPE SIZE (IN.)	STYLE 1390-P		A (IN.)	B APPROX (IN.)	C MAX (IN.)	RESTRAINING RODS		CLAMPING BOLTS PER GLAND		BC MIN (IN.)	BC MAX (IN.)	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD (IN.)	CATALOG No.				QTY.	SIZE (IN.)	QTY.	SIZE (IN.)				
15	15.30	UFR1390-P-15-U	4	22-1/2	28	4	3/4 x 30	4	7/8 x 7	18.50	20.50	118	
18	18.70	UFR1390-P-18-U	4	26-3/16	28	4	3/4 x 30	4	7/8 x 7	21.88	23.88	118	
21	22.05	UFR1390-P-21-U	4	28-13/16	34	4	3/4 x 36	4	7/8 x 7	24.56	26.56	126	
24	24.80	UFR1390-P-24-U	4	32-3/16	34	4	3/4 x 36	4	7/8 x 7	27.94	29.94	142	
27	27.95	UFR1390-P-27-U	4	35-3/8	34	4	3/4 x 36	4	7/8 x 7	31.09	33.09	163	

FEATURES

- Carbon steel per ASTM A36
- Shop coat - NSF 61 certified
- Side clamping bolts and nuts - SAE J429, grade 5
- Rods (included) - High strength, low alloy steel per ANSI / AWWA C111/A21.11
- 50 psi rated working pressure with a 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



07/11/24

Submitted By: