



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-S-xx-U100 style)




SERIES 1390-S RESTRAINT HARNESS FOR STEEL SIZE PVC PIPE BELL AND SPIGOT JOINTS

1300 SPLIT RESTRAINT

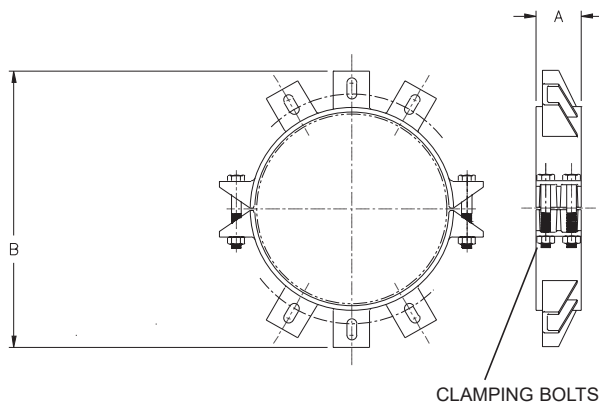

1390 ASSEMBLY

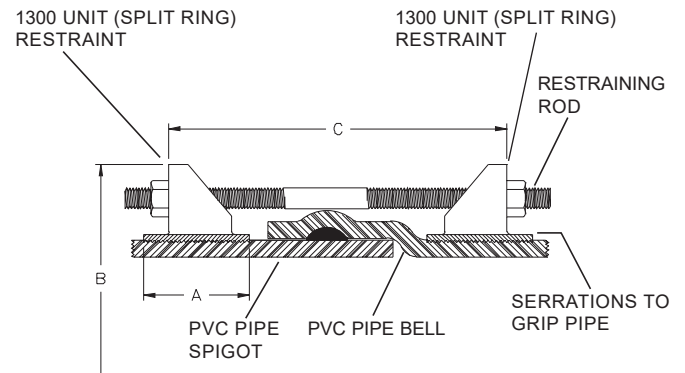

NOM PIPE SIZE (IN.)	PVC PIPE WITH STEEL PIPE OD STYLE 1390-S		A (IN.)	B APPROX (IN.)	C MAX (IN.)	RESTRAINING RODS		CLAMPING BOLTS PER GLAND		MAX BELL CLEARANCE (IN.)	APPROX WT. LBS.	✓SUBMITTED ITEM(S)
	OD (IN.)	CATALOG No.				QTY.	SIZE (IN.)	QTY.	SIZE (IN.)			
14	14.00	UFR1390-S-14-U100	4	21-7/16	28	6	3/4 x 30	4	7/8 x 7	18.25	136	
16	16.00	UFR1390-S-16-U100	4	23-5/16	28	6	3/4 x 30	4	7/8 x 7	20.22	147	
18	18.00	UFR1390-S-18-U100	5	25-9/16	28	8	3/4 x 30	4	1 x 7	22.22	206	
20	20.00	UFR1390-S-20-U100	5	27-9/16	34	8	3/4 x 36	4	1 x 7	24.25	263	
24	24.00	UFR1390-S-24-U100	5	31-9/16	34	12	3/4 x 36	4	1 x 7	28.25	406	
30	30.00	UFR1390-S-30-U100	10	38-3/4	46	12	1 x 48	6	1-1/8 x 9	35.00	575	
36	36.00	UFR1390-S-36-U100	10	45-7/8	46	12	1 x 48	6	1-1/8 x 9	42.13	600	
42	42.00	UFR1390-S-42-U100	10	54-11/16	70	18	1-1/4 x 52	8	1-1/8 x 9	51.75	750	
48	48.00	UFR1390-S-48-U100	10	60-7/8	70	22	1-1/4 x 52	8	1-1/8 x 9	58.00	800	

Note: For DR18, longer rods may be required. Please contact factory for more information.

FEATURES

- Fabricated from carbon steel per ASTM A36
- Restraining rods, clamping bolts and hardware - High strength, low alloy steel per ANSI / AWWA C111/A21.11
- Rated at full-rated pressure of any class of steel size PVC pipe, minimum 2:1 safety factor
- Finish - Shop coat with gray topcoat for identification purposes - NSF 61 certified
- 100% manufactured in the United States of America

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com



06/03/25

Submitted By: