



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1390-S-xx-Y-U style)




SERIES 1390-S RESTRAINT HARNESS FOR STEEL SIZE PVC PIPE BELL JOINTS WITH TYPE 304 STAINLESS STEEL AND EPOXY COATING

1300 SPLIT RESTRAINT

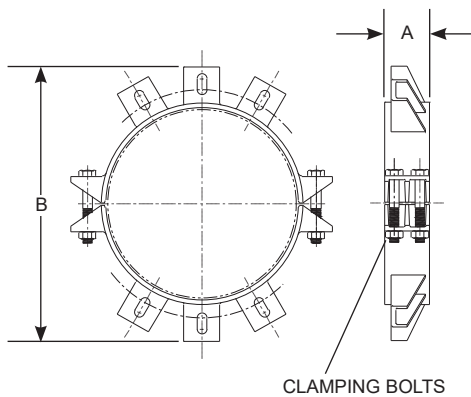

1390 ASSEMBLY

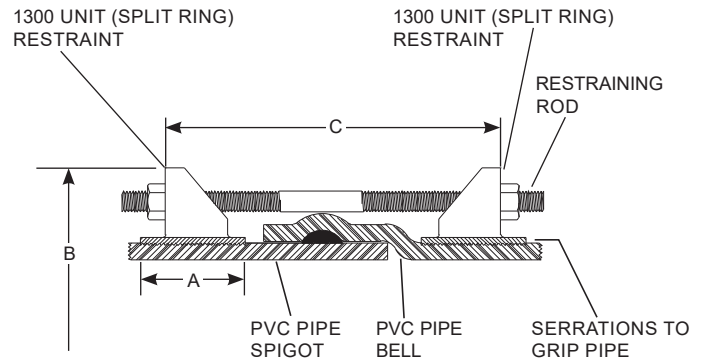

NOM PIPE SIZE (IN.)	OD (IN.)	CATALOG No.	A (IN.)	B APPROX (IN.)	C MAX (IN.)	RESTRAINING RODS		CLAMPING BOLTS PER GLAND		MAX BELL CLEARANCE (IN.)	APPROX WT. LBS.	✓SUBMITTED ITEM(S)
						No.	SIZE (IN.)	No.	SIZE (IN.)			
16	16.00	UFR1390-S-16-Y-U	4	23-5/16	28	6	3/4 x 30	4	7/8 x 7	20.22	147	
18	18.00	UFR1390-S-18-Y-U	5	25-9/16	28	8	3/4 x 30	4	1 x 7	22.22	206	
20	20.00	UFR1390-S-20-Y-U	5	27-9/16	34	8	3/4 x 36	4	1 x 7	24.25	263	
24	24.00	UFR1390-S-24-Y-U	5	31-9/16	34	12	3/4 x 36	4	1 x 7	28.25	406	
30	30.00	UFR1390-S-30-Y-U	10	38-3/4	46	12	1 x 48	6	1-1/8 x 9	35.00	575	
36	36.00	UFR1390-S-36-Y-U	10	45-7/8	46	12	1 x 48	6	1-1/8 x 9	42.13	600	
42	42.00	UFR1390-S-42-Y-U	10	54-11/16	70	18	1-1/4 x 52	8	1-1/8 x 9	51.75	750	
48	48.00	UFR1390-S-48-Y-U	10	60-7/8	70	22	1-1/4 x 52	8	1-1/8 x 9	58.00	800	

Note: For DR18, longer rods may be required. Please contact factory for more information.

FEATURES

- Fabricated from carbon steel per ASTM A36
- Restraining rods, clamping bolts and hardware - Type 304 stainless steel per ASTM A193 and ASTM A194
- Rated at full-rated pressure of any class of steel size PVC pipe, minimum 2:1 safety factor
- Finish - Epoxy coating with gray topcoat for identification purposes - NSF 61 certified

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com



06/03/25

Submitted By: