



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR1390Q-C-x-U style)




### 316 STAINLESS STEEL SERIES 1390-C RESTRAINT HARNESS FOR C900 PVC AND STAINLESS STEEL PIPE BELL JOINTS

**1300 SPLIT RESTRAINT**

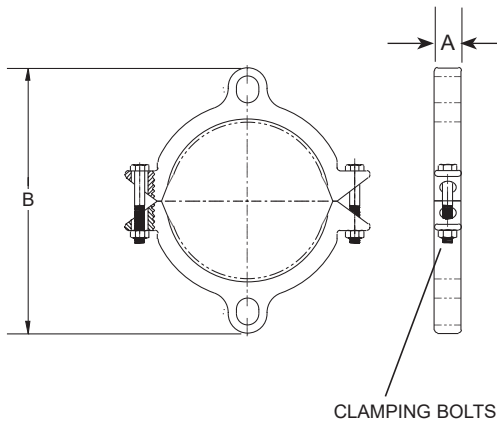

**1390 ASSEMBLY**

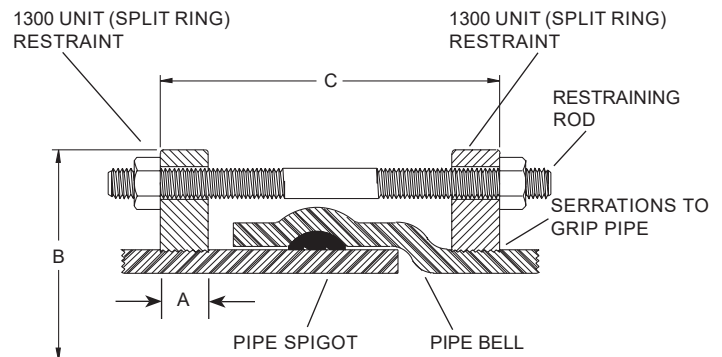

NOM. PIPE SIZE (IN.)	OD (IN.)	CATALOG NUMBER	A (IN.)	B APPROX. (IN.)	C MAX (IN.)	RESTRAINT BOLTS / RODS		CLAMPING BOLTS PER GLAND		MAX. BELL CLEARANCE (IN.)	APPROX. WEIGHT LBS.	✓ SUBMITTED ITEMS
						No.	SIZE (IN.)	No.	SIZE (IN.)			
4	4.80	UFR1390Q-C-4-U	1-1/4	9-1/8	15	2	3/4 x 17	2	5/8 x 3-1/2	6.63	17.0	
6	6.90	UFR1390Q-C-6-U	1-1/4	11-1/8	15	2	3/4 x 17	2	5/8 x 3-1/2	8.63	18.5	
8	9.05	UFR1390Q-C-8-U	1-1/4	14-5/8	15	2	3/4 x 17	2	3/4 x 4	12.13	28.0	
10	11.10	UFR1390Q-C-10-U	1-1/4	16-5/8	22	4	3/4 x 24	2	7/8 x 5	14.13	51.5	
12	13.20	UFR1390Q-C-12-U	1-1/4	19-1/4	22	4	3/4 x 24	2	7/8 x 5	16.75	55.5	

## FEATURES

- Restraining - Type 316 stainless steel per ASTM A240
- Restraining rods (included) - Type 316 stainless steel per ASTM A193 and A194
- Side clamping bolts and nuts - Type 316 stainless steel per ASTM A193 and A194
- Rated at full-rated pressure of any class of PVC pipe, minimum 2:1 safety factor
- Rated at 150 psi on schedule 10 (minimum) stainless steel
- 360° contact and support of the pipe wall

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



### The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

[www.fordmeterbox.com](http://www.fordmeterbox.com)



05/15/25

Submitted By: