



# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR1399-C-x-I style)




UNI-FLANGE SERIES 1399-C RESTRAINT HARNESS FOR C900 PVC, C909 PVC AND C906 HDPE BELL JOINTS

### 1309-C SPLIT RESTRAINT

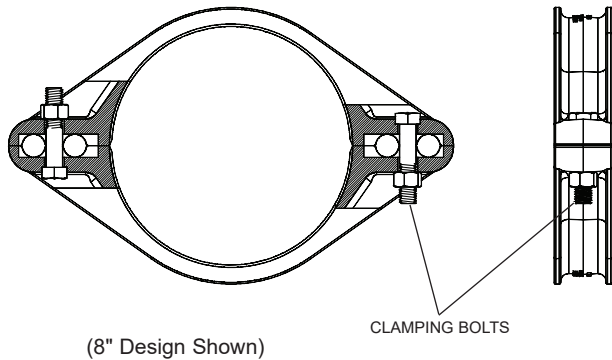

### 1399-C ASSEMBLY

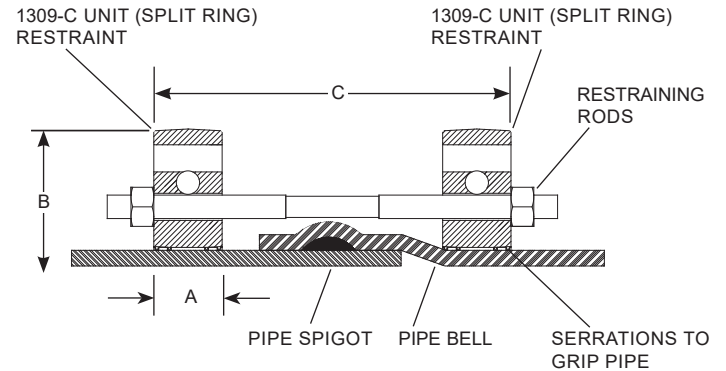

PATENT  
10,837,584

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1399-C		A	B APPROX.	C MAX	RESTRAINING BOLTS / RODS		CLAMPING BOLTS		MAX BELL CLEARANCE	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD (In.)	CATALOG No.				No.	SIZE	No.	SIZE			
4"	4.80	UFR1399-C-4-I	2-13/64"	10-13/16"	15"	2	3/4" x 17"	4	5/8" x 2-1/2"	6.63"	17.69	
6"	6.90	UFR1399-C-6-I	2-13/64"	12-13/16"	15"	2	3/4" x 17"	4	5/8" x 2-1/2"	8.63"	20.48	
8"	9.05	UFR1399-C-8-I	2-13/64"	16-47/64"	15"	2	3/4" x 17"	4	3/4" x 3"	14.00"	33.39	
10"	11.10	UFR1399-C-10-I	2-1/4"	19-1/16"	22"	4	3/4" x 24"	4	5/8" x 3"	14.13"	61.14	
12"	13.20	UFR1399-C-12-I	2-13/64"	21-3/8"	22"	4	3/4" x 24"	4	5/8" x 3"	16.63"	72.46	

### FEATURES

- Cast ductile iron per ASTM A536 grade 65-45-12
- Restraining Rods (included) - High strength, low alloy steel ANSI / AWWA C111 / A21.11
- Side Clamping Bolts and Nuts - Grade 5, zinc-plated
- Clamping pads and tie rod lugs co-located so installer doesn't have to work under the pipe.
- Rated at full-rated pressure of any class of C900 and C909 PVC pipe, minimum 2:1 safety factor
- Rated at full-rated pressure of any class of C906 HDPE pipe (provided an insert is used)
- Black Armorguard e-coat applied epoxy
- 360° contact and support of the pipe wall

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com

08/16/24

Submitted By: