



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1399-C-xx-Q-U style)



10"-24" UNI-FLANGE SERIES 1399-C RESTRAINT DEVICE (WITH TYPE 316 STAINLESS STEEL HARDWARE)
FOR C900 AND C909 BELL AND SPIGOT JOINTS

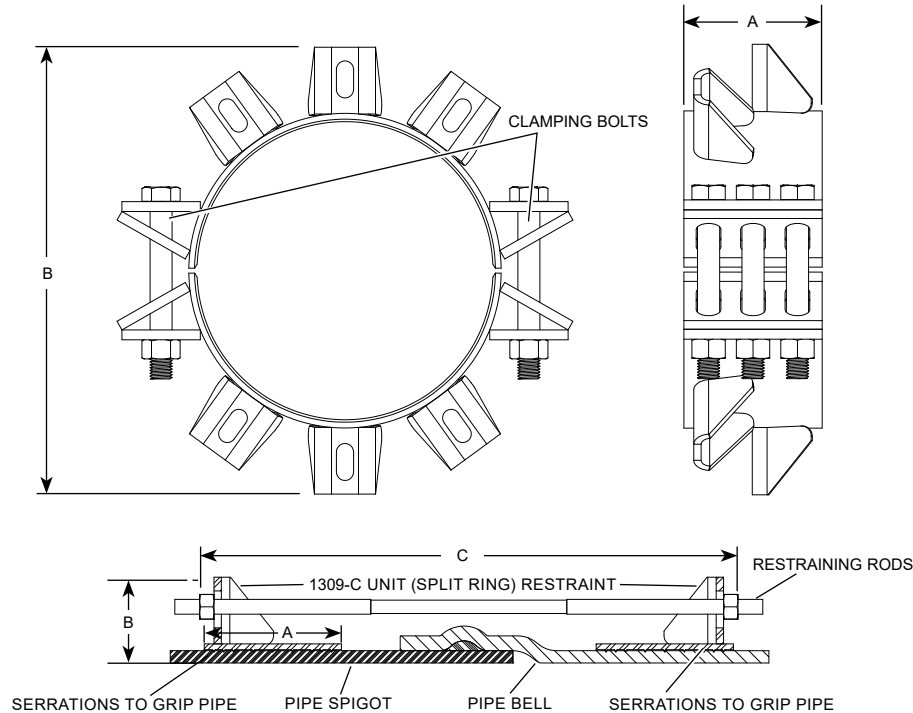

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1399-C		A	B APPROX.	C MAX	RESTRAINING BOLTS / RODS		CLAMPING BOLTS		MAX BELL CLEARANCE	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD (In.)	CATALOG No.				No.	SIZE	No.	SIZE			
10"	11.10	UFR1399-C-10-Q-U	4"	18-39/64"	22"	4	3/4" x 24"	4	7/8" x 7"	15.63"	92.30	
12"	13.20	UFR1399-C-12-Q-U	4"	20-1/2"	22"	4	3/4" x 24"	4	7/8" x 7"	17.75"	104.80	
14"	15.30	UFR1399-C-14-Q-U	7"	22-41/64"	28"	6	3/4" x 30"	12	1-1/8" x 9"	19.56"	219.48	
16"	17.40	UFR1399-C-16-Q-U	7"	24-49/64"	28"	6	3/4" x 30"	12	1-1/8" x 9"	21.68"	239.48	
18"	19.50	UFR1399-C-18-Q-U	7"	26-3/4"	28"	8	3/4" x 30"	12	1-1/8" x 9"	23.75"	262.46	
20"	21.60	UFR1399-C-20-Q-U	10"	28-49/64"	34"	8	3/4" x 36"	12	1-1/8" x 9"	25.88"	288.42	
24"	25.80	UFR1399-C-24-Q-U	10"	33-1/8"	34"	12	3/4" x 36"	12	1-1/8" x 9"	30.15"	360.34	

FEATURES

- Manufactured from carbon steel per ASTM A36
- Restraining rods, bolts and nuts (included) - Type 316 stainless steel per ASTM A193 and ASTM A194
- Rated at full working pressure of any class of C900 PVC, minimum 2:1 safety factor
- Rated at 235 psi on C909 PVC, minimum 2:1 safety factor
- Coating - Black alkyd enamel shop coat (NSF61 approved)
- 360° contact and support of the pipe wall
- Staggered tie rod lug positioning for high performance

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

12/14/20

Submitted By: