



SUBMITTAL INFORMATION

Uni-Flange® Restraint - (UFR1399-C-xx-U style)



10"-24" UNI-FLANGE SERIES 1399-C RESTRAINT DEVICE FOR C900, C909
AND C906 HDPE BELL AND SPIGOT JOINTS

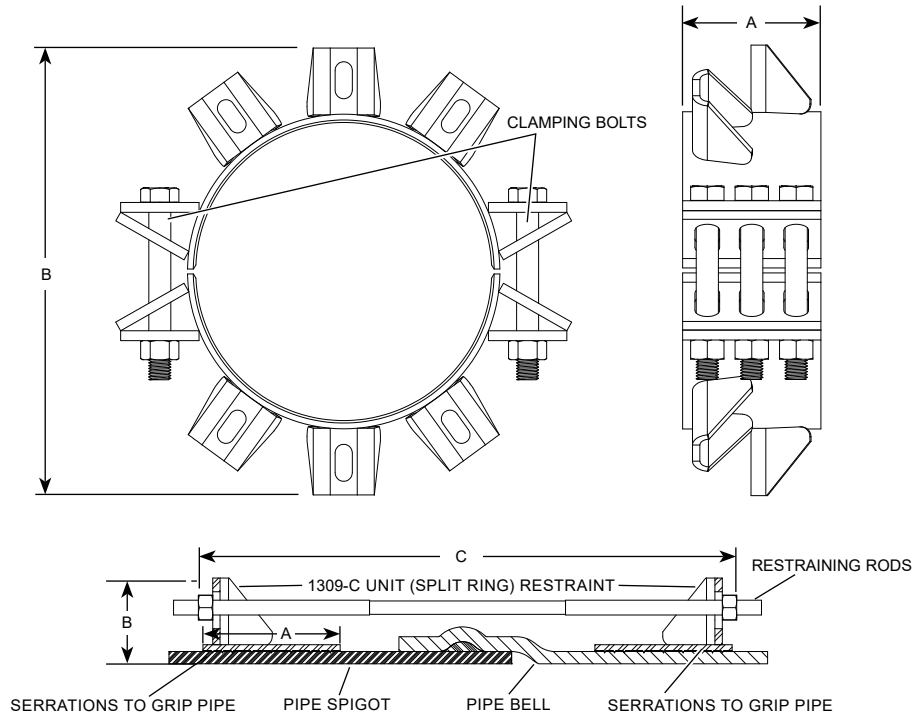

NOM PIPE SIZE	PVC PIPE WITH DI PIPE OD STYLE 1399-C		A	B APPROX.	C MAX	RESTRAINING BOLTS / RODS		CLAMPING BOLTS		MAX BELL CLEARANCE	APPROX. WT. LBS.	✓ SUBMITTED ITEM(S)
	OD (IN.)	CATALOG NO.				No.	SIZE	No.	SIZE			
10"	11.10	UFR1399-C-10-U	4"	18-39/64"	22"	4	3/4" x 24"	4	7/8" x 7"	15.63"	92.30	
12"	13.20	UFR1399-C-12-U	4"	20-1/2"	22"	4	3/4" x 24"	4	7/8" x 7"	17.75"	104.80	
14"	15.30	UFR1399-C-14-U	7"	22-41/64"	28"	6	3/4" x 30"	12	1-1/8" x 9"	19.56"	219.48	
16"	17.40	UFR1399-C-16-U	7"	24-49/64"	28"	6	3/4" x 30"	12	1-1/8" x 9"	21.68"	239.48	
18"	19.50	UFR1399-C-18-U	7"	26-3/4"	28"	8	3/4" x 30"	12	1-1/8" x 9"	23.75"	262.46	
20"	21.60	UFR1399-C-20-U	10"	28-49/64"	34"	8	3/4" x 36"	12	1-1/8" x 9"	25.88"	288.42	
24"	25.80	UFR1399-C-24-U	10"	33-1/8"	34"	12	3/4" x 36"	12	1-1/8" x 9"	30.15"	360.34	

FEATURES

- Manufactured from carbon steel per ASTM A36
- Restraining rods are high strength, low alloy steel per ANSI / AWWA C111 / A21.11
- Clamping bolts and nuts are high strength, low alloy steel per ANSI / AWWA C111 / A21.11
- Rated at full working pressure of any class of C905 PVC, minimum 2:1 safety factor
- Rated at full-rated pressure of any class of C906 HDPE pipe (provided an insert is used)
- Rated at 235 psi on C909 PVC, minimum 2:1 safety factor
- Coating - Black alkyd enamel shop coat (NSF61 approved)
- 360° contact and support of the pipe wall
- Staggered tie rod lug positioning for high performance

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

12/14/20

Submitted By: