


SUBMITTAL INFORMATION




Uni-Flange® Restraint - (UFR1400-D-x-XL style)



OVERSIZE WEDGE ACTION SERIES 1400-D-XL RESTRAINT GLAND FOR CLASS C & D GREY IRON PIPE

Ductile iron wedge activating screw, with the Auto-Tork® break-away head design, ensures proper torque during installation.

Gland body is of High Strength Ductile Iron per ASTM A536, Grade 65-45-12. Compatible with all mechanical joints conforming to ANSI / AWWA C111 / A21.11.

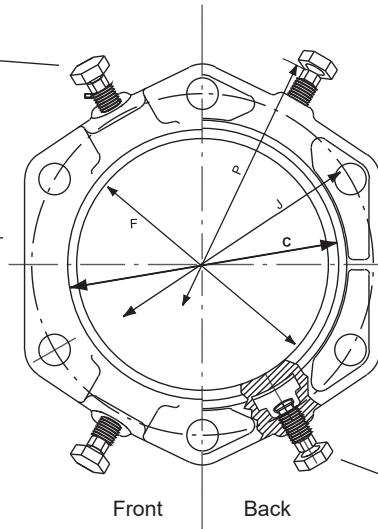

Wedges are ductile iron and heat treated to a hardness of 370 BHN minimum.

NOM. PIPE SIZE	O.D. (IN.)	CATALOG NUMBER	PRESSURE RATING (PSI)	NO. OF WEDGES	APPROX. WEIGHT (LBS.)	P* (IN.)	C (IN.)	D (IN.)	F (IN.)	M (IN.)	J (IN.)	SUBMITTED ITEM(S)
4	5.00	UFR1400-D-4-XL	250	2	7.0	10.0	5.92	2.65	5.10	0.88	7.50	
6	7.10	UFR1400-D-6-XL	250	3	10.5	12.1	8.02	2.65	7.20	0.88	9.50	
8	9.30	UFR1400-D-8-XL	250	4	14.0	14.3	10.17	2.65	9.40	1.10	11.75	
10	11.40	UFR1400-D-10-XL	250	6	23.0	16.3	12.22	2.75	11.50	1.10	14.00	
12	13.50	UFR1400-D-12-XL	250	8	28.0	18.4	14.32	2.75	13.60	1.10	16.25	

* Maximum O.D. of gland on pipe after wedges have been activated and break-away heads have been removed.

FEATURES

- Eliminates the need of costly and time consuming concrete thrust blocks and corrosion susceptible steel tie rods
- Auto-Tork wedge activating screws assure proper installation
- Wedges are contoured to fit the pipe
- Color coded grey
- Gland, screws and wedges are black e-coated

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/27/21

Submitted By: