



SUBMITTAL INFORMATION

Uni-Flange Split Retainer (*UFR1490-D-x-RB-I* style)



WEDGE ACTION SERIES 1490-D SPLIT RESTRAINT WITH SPLIT BACK UP RING ASSEMBLY FOR DUCTILE IRON PIPE BELL JOINT

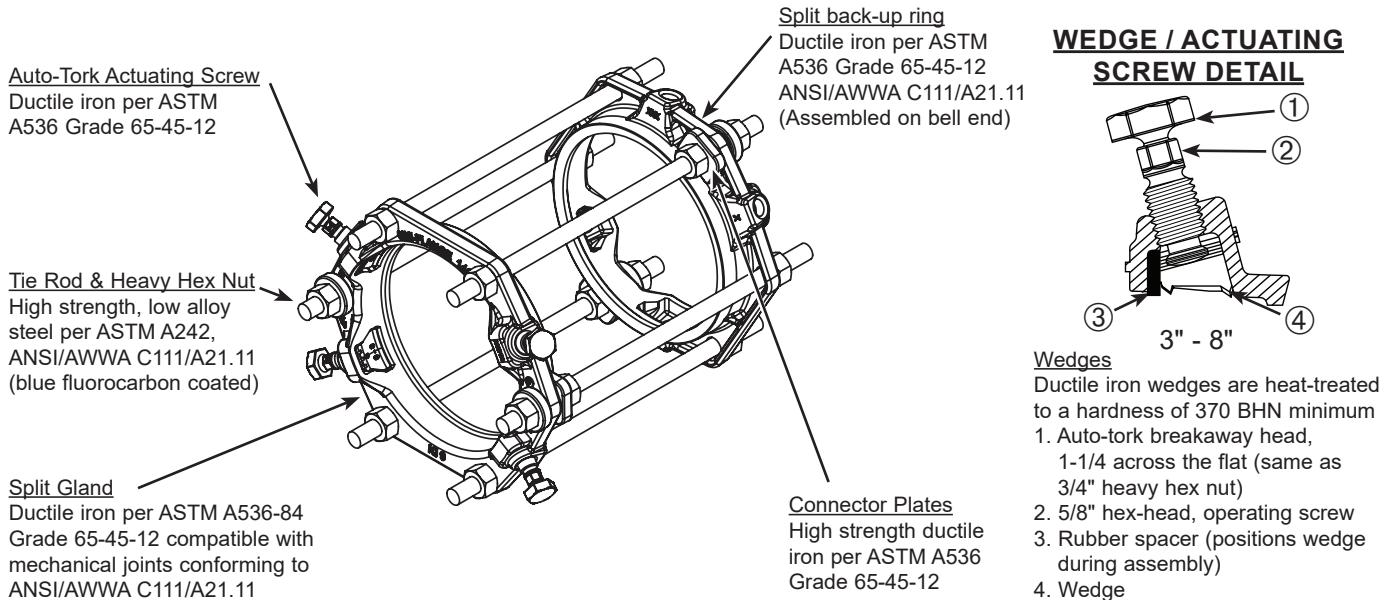

NOM. PIPE SIZE (IN.)	PIPE O.D. (IN.)	RODS			PRESSURE RATING (PSI)	*MAX. BELL DIA. (IN.)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
		No.	LENGTH (IN.)	DIA. (IN.)					
3	3.96	4	14	5/8	350	5.50	12	UFR1490-D-3-RB-I	
4	4.80	4	17	3/4	350	6.62	20	UFR1490-D-4-RB-I	
6	6.90	6	17	3/4	350	8.62	29	UFR1490-D-6-RB-I	
8	9.05	6	17	3/4	350	10.88	35	UFR1490-D-8-RB-I	

* Connecting rods WILL NOT CLEAR a pipe bell with a maximum diameter larger than the listed measurement.

FEATURES

- Split gland - Ductile iron per ASTM A536, grade 65-45-12
- Wedge actuating screw - Ductile iron per ASTM A536, grade 65-45-12
- Split back-up ring - Ductile iron per ASTM A536, grade 65-45-12
- Wedge - Ductile iron per ASTM A536 heat treated to hardness of 370 BHN minimum
- Restraining rods and nuts - High strength low alloy steel per ASTM A242, blue fluorocarbon coated
- Finish - Black e-coat epoxy
- New or existing installations
- 2:1 safety factor at rated working pressure; 3"-8" - 350 PSI RWP
- Imported ductile iron castings

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: