



SUBMITTAL INFORMATION


Uni-Flange® Split Joint Restraint - (UFR1495-D-x-X-I style)



WEDGE ACTION SERIES 1495-D SPLIT RESTRAINT GLAND FOR DUCTILE IRON PIPE

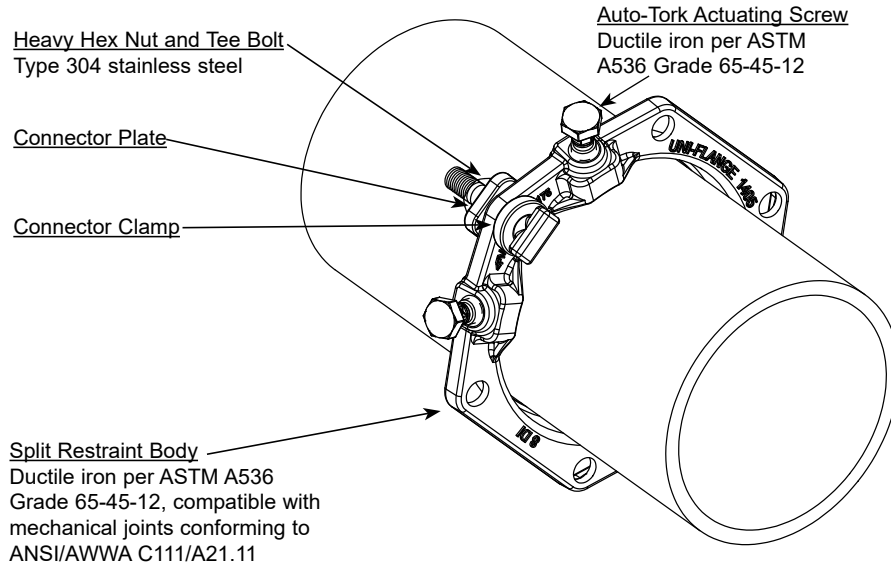

WEDGE / ACTUATING SCREW DETAIL



Wedges

Ductile iron wedges are heat-treated to a hardness of 370 BHN minimum

1. Auto-tork breakaway head, 1-1/4 across the flat (same as 3/4" heavy hex nut)
2. 5/8" hex-head, operating screw
3. Rubber spacer (positions wedge during assembly)
4. Wedge

NOM. PIPE SIZE	PIPE O.D. (IN.)	NO. OF BOLTS HOLES	NO. OF WEDGES	PRESSURE RATING (PSI)	*MAX. RESTRAINT O.D.	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
3"	3.96	4	2	350	9.06	6.0	UFR1495-D-3-X-I	
4"	4.80	4	2	350	10.00	7.5	UFR1495-D-4-X-I	
6"	6.90	6	3	350	12.10	11.0	UFR1495-D-6-X-I	
8"	9.05	6	4	350	14.30	14.5	UFR1495-D-8-X-I	

* Maximum O.D. of gland on pipe after wedges have been activated and break-away heads have been removed.

FEATURES

- Gland - Ductile iron per ASTM A536, grade 65-45-12
- Wedge actuating screws - Ductile iron per ASTM A536, grade 65-45-12
- Wedge - Ductile iron per ASTM A536 heat treated to hardness of 370 BHN minimum
- Heavy Hex Nuts and Tee-Bolts - Type 304 stainless steel per ASTM A193 and A194
- Coating - Black e-coat epoxy
- 350 PSI rated working pressure with 2:1 safety factor

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/21/21

Submitted By: