



# SUBMITTAL INFORMATION

## Mechanical Joint Retainer (*UFR1559-C-x-U style*)



4" - 18" SERIES UFR1559 RESTRAINT FOR C909 BELL JOINTS (NEW INSTALLATIONS ONLY)

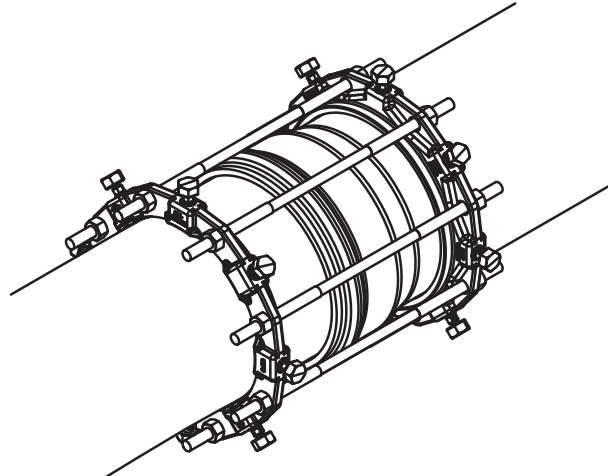

| NOM. PIPE SIZE | PRESSURE RATING (PSI) | CATALOG NUMBER | NO. OF RODS | ROD LENGTH | ROD DIA. | *MAX BELL DIA. | APPROX. WEIGHT (LBS) | ✓ SUBMITTED ITEMS |
|----------------|-----------------------|----------------|-------------|------------|----------|----------------|----------------------|-------------------|
| 4"             | 235                   | UFR1559-C-4-U  | 4           | 17"        | 3/4"     | 6.62"          | 25                   |                   |
| 6"             | 235                   | UFR1559-C-6-U  | 6           | 17"        | 3/4"     | 8.62"          | 33                   |                   |
| 8"             | 235                   | UFR1559-C-8-U  | 6           | 17"        | 3/4"     | 10.88"         | 45                   |                   |
| 10"            | 235                   | UFR1559-C-10-U | 8           | 24"        | 5/8"     | 13.12"         | 58                   |                   |
| 12"            | 235                   | UFR1559-C-12-U | 8           | 24"        | 5/8"     | 15.38"         | 62                   |                   |
| 14"            | 235                   | UFR1559-C-14-U | 10          | 30"        | 3/4"     | 17.88"         | 120                  |                   |
| 16"            | 235                   | UFR1559-C-16-U | 12          | 30"        | 3/4"     | 20.12"         | 130                  |                   |
| 18"            | 235                   | UFR1559-C-18-U | 12          | 30"        | 3/4"     | 22.38"         | 196                  |                   |

\* Note: Connecting rods WILL NOT CLEAR a pipe bell with a maximum diameter larger than the listed measurement. These diameters do not include joint deflection. Confirm pipe bell diameter before ordering.

\*\* 10" and 12" connecting rods are 5/8" for additional bell clearance

### FEATURES

- Full circle contact and support of the pipe wall
- Auto-Tork actuating screws with heads specially designed to twist off at the correct installation torque, leaving a hex head in case future system maintenance or removal is required
- Restraining segments are mechanically retained in pockets
- Gland, screws and segments are black epoxy coated using the e-coat process
- Gland colored red for identification purposes
- Restraining rods - High-strength, low alloy steel per ASTM A242

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
www.fordmeterbox.com



06/25/21

Submitted By: