


# SUBMITTAL INFORMATION

## Uni-Flange® Restraint - (UFR2800-DA-x-EPDM-U style)




### WEDGE ACTION SERIES 2800-D RESTRAINT GLAND FOR DUCTILE IRON PIPE WITH ACCESSORIES

Wedges are ductile iron and heat treated to a hardness of 370 BHN minimum.

High strength low alloy t-bolts and nuts AWWA C111



Gasket

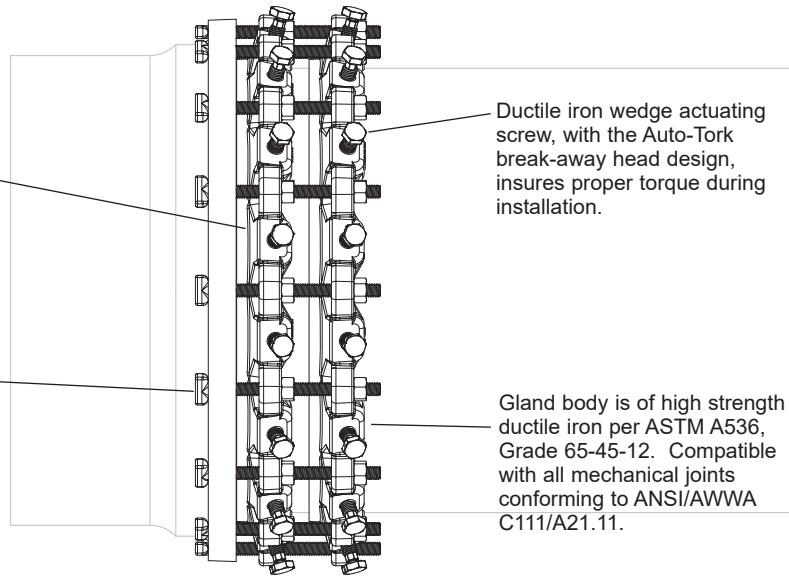

Ductile iron wedge actuating screw, with the Auto-Tork break-away head design, insures proper torque during installation.

Gland body is of high strength ductile iron per ASTM A536, Grade 65-45-12. Compatible with all mechanical joints conforming to ANSI/AWWA C111/A21.11.

| NOM. PIPE SIZE (IN.) | O.D. (IN.) | CATALOG NUMBER       | PRESSURE RATING (PSI) | APPROX. WEIGHT (LBS.) | MAX RESTRAINT O.D.* (IN.) | ✓ SUBMITTED ITEM(S) |
|----------------------|------------|----------------------|-----------------------|-----------------------|---------------------------|---------------------|
| 3                    | 3.96       | UFR2800-DA-3-EPDM-U  | 500                   | 17.0                  | 9.06                      |                     |
| 4                    | 4.80       | UFR2800-DA-4-EPDM-U  | 500                   | 23.0                  | 10.0                      |                     |
| 6                    | 6.90       | UFR2800-DA-6-EPDM-U  | 500                   | 35.0                  | 12.1                      |                     |
| 8                    | 9.05       | UFR2800-DA-8-EPDM-U  | 500                   | 43.0                  | 14.3                      |                     |
| 10                   | 11.10      | UFR2800-DA-10-EPDM-U | 500                   | 63.0                  | 16.3                      |                     |
| 12                   | 13.20      | UFR2800-DA-12-EPDM-U | 500                   | 83.0                  | 18.4                      |                     |
| 14                   | 15.30      | UFR2800-DA-14-EPDM-U | 450                   | 114.0                 | 20.9                      |                     |
| 16                   | 17.40      | UFR2800-DA-16-EPDM-U | 450                   | 128.0                 | 23.0                      |                     |
| 18                   | 19.50      | UFR2800-DA-18-EPDM-U | 350                   | 162.0                 | 25.8                      |                     |
| 20                   | 21.60      | UFR2800-DA-20-EPDM-U | 350                   | 180.0                 | 27.9                      |                     |
| 24                   | 25.80      | UFR2800-DA-24-EPDM-U | 350                   | 214.0                 | 32.1                      |                     |

\* Maximum O.D. of gland on pipe after wedges have been activated and break-away heads have been removed.

### FEATURES

- Eliminates the need of costly and time consuming concrete thrust blocks and corrosion susceptible steel tie rods
- Auto-Tork wedge actuating screws assure proper installation
- Wedges are contoured to fit the pipe
- High strength, low alloy t-bolts and nuts per AWWA C111
- EPDM mechanical joint gasket per AWWA C111
- All sizes pressure tested to twice the listed pressure rating
- Gland, screws and wedges are black e-coated

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



**The Ford Meter Box Company, Inc.**  
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
Phone: 260-563-3171 / Fax: 800-826-3487  
Overseas Fax: 260-563-0167  
[www.fordmeterbox.com](http://www.fordmeterbox.com)

Submitted By: