


SUBMITTAL INFORMATION



Uni-Flange® Restraint - (UFR2800-DA-x-X-I style)



WEDGE ACTION SERIES 2800-D RESTRAINT GLAND FOR DUCTILE IRON PIPE WITH ACCESSORIES

Wedges are ductile iron and heat treated to a hardness of 370 BHN minimum.

High strength low alloy t-bolts and nuts AWWA C111

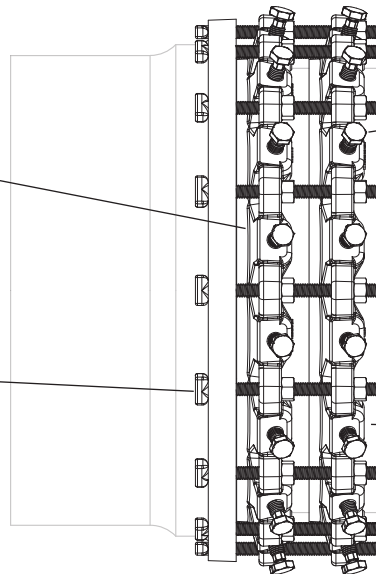

Ductile iron wedge actuating screw, with the Auto-Tork break-away head design, insures proper torque during installation.

Gland body is of high strength ductile iron per ASTM A536, Grade 65-45-12. Compatible with all mechanical joints conforming to ANSI/AWWA C111/A21.11.

NOM. PIPE SIZE (IN.)	O.D. (IN.)	CATALOG NUMBER	PRESSURE RATING (PSI)	APPROX. WEIGHT (LBS.)	MAX RESTRAINT O.D.* (IN.)	✓ SUBMITTED ITEM(S)
3	3.96	UFR2800-DA-3-X-I	500	17.0	9.06	
4	4.80	UFR2800-DA-4-X-I	500	23.0	10.0	
6	6.90	UFR2800-DA-6-X-I	500	35.0	12.1	
8	9.05	UFR2800-DA-8-X-I	500	43.0	14.3	
10	11.10	UFR2800-DA-10-X-I	500	63.0	16.3	
12	13.20	UFR2800-DA-12-X-I	500	83.0	18.4	
14	15.30	UFR2800-DA-14-X-I	450	114.0	20.9	
16	17.40	UFR2800-DA-16-X-I	450	128.0	23.0	
18	19.50	UFR2800-DA-18-X-I	350	162.0	25.8	
20	21.60	UFR2800-DA-20-X-I	350	180.0	27.9	
24	25.80	UFR2800-DA-24-X-I	350	214.0	32.1	

* Maximum O.D. of gland on pipe after wedges have been activated and break-away heads have been removed.

FEATURES

- Eliminates the need of costly and time consuming concrete thrust blocks and corrosion susceptible steel tie rods
- Auto-Tork wedge actuating screws assure proper installation
- Wedges are contoured to fit the pipe
- Type 304 stainless steel t-bolts and nuts per ASTM A193 and A194
- SBR mechanical joint gasket per AWWA C111
- All sizes pressure tested to twice the listed pressure rating
- Gland, screws and wedges are black e-coated

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

02/07/23

Submitted By: