



SUBMITTAL INFORMATION

Uni-Flange Retainer (*UFR2800-DA-xx-I* style)



WEDGE ACTION SERIES 2800-D RETAINER GLAND FOR DUCTILE IRON PIPE WITH ACCESSORIES

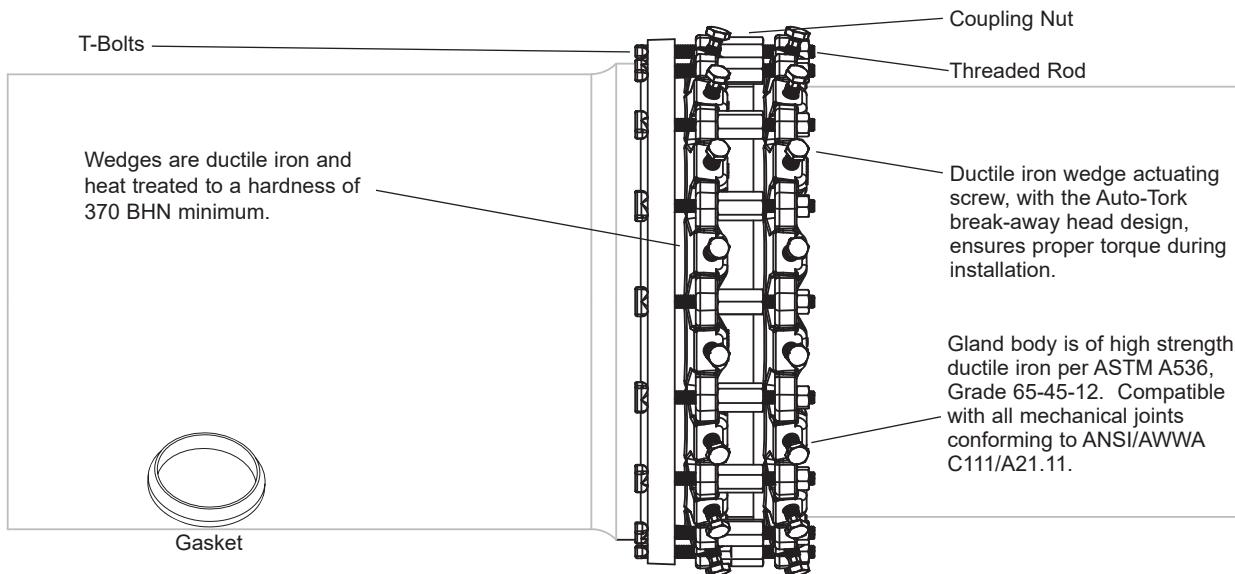

NOM. PIPE SIZE (IN.)	O.D. (IN.)	CATALOG NUMBER	PRESSURE RATING (PSI)	APPROX. WEIGHT (LBS.)	MAX RESTRAINT O.D.* (IN.)	✓ SUBMITTED ITEM(S)
30	32.00	UFR2800-DA-30-I	350	528.0	38.6	
36	38.30	UFR2800-DA-36-I	350	636.0	44.9	

* Maximum O.D. of gland on pipe after wedges have been activated and break-away heads have been removed.

FEATURES

- Eliminates the need of costly and time consuming concrete thrust blocks and corrosion susceptible steel tie rods
- Auto-Tork wedge actuating screws assure proper installation
- Wedges are contoured to fit the pipe
- High strength, low alloy T-Bolts, coupling nuts, threaded rods and nuts per AWWA C111
- SBR Uni-Seal gasket per ASTM D2000
- All sizes pressure tested to twice the listed pressure rating
- Gland, screws and wedges are black e-coated

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: